

FORM PTO-1390  
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

9319S-000137

U.S. APPLICATION NO. (if known see 37 CFR 1.5)

**09/600145**INTERNATIONAL APPLICATION NO.  
PCT/JP99/06190INTERNATIONAL FILING DATE  
05 November 1999 (5.11.99)PRIORITY DATE CLAIMED  
11 November 1998 (11.11.98)

TITLE OF INVENTION

LIQUID-CRYSTAL DISPLAY APPARATUS

APPLICANT(S) FOR DO/EO/US

Hiroki NAKAHARA, Masaru ITO, Takeshi NAKAMURA and Keiichi SUEHIRO

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND or SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).  
A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
4. ☐ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
5. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
6. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
7. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
8. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
9. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11. to 16. below concern document(s) or information included:**

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:  
14 Sheets of Drawings, International Search Report, English Translation of International Search Report, Form HDP-1449 with copies of references cited (3 Japan) and Request for Approval of Drawing Changes with 4 sheets of drawings with changes made to FIGS. 11-14.

534 Rec'd PCT 10 JUL 2000

09/600145

- 17.
- ☒
- The following fees are submitted:

**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5))**

Neither international preliminary examination fee (37 CFR 1.482)  
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO  
and International Search Report not prepared by the EPO or JPO ..... \$970.00

International preliminary examination fee (37 CFR 1.482) not paid to  
USPTO but International Search Report prepared by the EPO or JPO ..... \$840.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but  
international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$760.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$670.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$96.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =****CALCULATIONS** PTO USE ONLY

\$ 840.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(c)).

\$ 0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	16 -20 =	0	X \$18.00
Independent claims	3 -3 =	0	X \$78.00

\$ 0.00

\$ 0.00

MULTIPLE DEPENDENT CLAIM(S) (if applicable)

+\$260.00

\$ 0.00

**TOTAL OF ABOVE CALCULATIONS =**

\$ 840.00

Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement  
must also be filed (Note 37 CFR 1.9, 1.27, 1.28).

\$ 0.00

**SUBTOTAL =**

\$ 840.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$ 0.00

**TOTAL NATIONAL FEE =**

\$ 840.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$ 40.00

**TOTAL FEES ENCLOSED =**

\$ 880.00

Amount to be:  
refunded \$  
charged \$

- a. ☒ A check in the amount of \$ 880.00 to cover the above fees is enclosed.

- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.

- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
overpayment to Deposit Account No. 08-0750 A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO

G. Gregory Schivley  
Harness, Dickey & Pierce, P.L.C.  
P.O. Box 828  
Bloomfield Hills, MI 48303  
U.S.A.

SIGNATURE

G. Gregory Schivley

NAME

27,382

REGISTRATION NUMBER

Attorney Docket No. 9319S-000137

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Hiroki NAKAHARA, et al. )  
Serial No.: Not Yet Assigned ) **PRELIMINARY**  
Filed: Herewith ) **AMENDMENT**  
For: **LIQUID-CRYSTAL DISPLAY APPARATUS** )  
\_\_\_\_\_ )

Hon. Commissioner of Patents & Trademarks  
Washington, D.C. 20231

**CERTIFICATE OF EXPRESS MAILING**

*I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231 on*

By \_\_\_\_\_  
*July 10, 2000*  
*[Signature]*

Sir:

Prior to the examination of this application, please amend it as follows:

**IN THE SPECIFICATION**

Page 1, line 14, please delete "12" and substitute --13-- therefor.

Page 3, line 4, after "area", please insert --IIX--.

Page 3, line 9, please delete "201X" and substitute --201Y-- therefor.

Page 8, line 3, please delete "30Y" and substitute --30-- therefor.

Page 25, line 10, please delete "304" and substitute --30-- therefor.

Page 25, line 16, please delete "304" and substitute --30-- therefor.

Page 34, line 5, after "the", please insert --scanning signal--.

Page 37, line 15, please delete "A))" and substitute --A)-- therefor.

## IN THE CLAIMS

Please amend the claims as follows:

1. (AMENDED) A liquid-crystal display apparatus comprising:

a first substrate having a first substrate terminal for conduction between substrates, located adjacent to [the] an edge of the substrate, and having a first electrode pattern which is electrically connected to said first substrate terminal for conduction between substrates and which is arranged so as to extend toward an edge opposing the edge to which said first [substrate] terminal for conduction between substrates is adjacent; and

a second substrate having a first input terminal for input from the outside located adjacent to [the] an edge of the substrate, a second substrate terminal for conduction between substrates, which is electrically connected to said first input terminal for input from the outside, a second input terminal for input from the outside, located on both sides of said first terminal for input from the outside, and a second electrode pattern which is electrically connected to said second input terminal for input from the outside,

characterized in that said first substrate and said second substrate are located in an opposed manner so as to extend in a direction in which said first electrode pattern and said second electrode pattern intersect with each other, and

said first substrate terminal for conduction between substrates and said second substrate terminal for conduction between substrates are electrically connected to each other by a conductive material sandwiched between said first substrate and said second substrate.

Claim 2, line 3, after "first", please insert --substrate--.

Claim 2, line 4, after "second", please insert --substrate--.

Claim 4, line 3, please delete "the" and substitute --an--.

Claim 4, line 10, please delete "the" (first occurrence) and substitute --an--.

Claim 4, line 16, please delete "IC," and substitute --IC-- therefor.

Please add the following new claims:

7. (NEW) A liquid-crystal apparatus comprising:

a first substrate;

a first substrate terminal formed on said first substrate;

a first electrode pattern formed on said first substrate and electrically connected to said first substrate terminal;

a second substrate;

a second substrate terminal formed on said second substrate;

an input terminal formed on said second substrate and electrically connected to said second substrate terminal;

a second electrode pattern formed on said first substrate and electrically connected to said input terminal; and

a conductive material sandwiched between said first and second substrates and electrically connecting said first and second substrate terminals;

wherein said first substrate is disposed opposite said second substrate such that said first and second electrode patterns intersect.

8. (NEW) The apparatus of Claim 7 wherein said first substrate terminal is disposed adjacent a first edge of said first substrate.

9. (NEW) The apparatus of Claim 8 wherein said first electrode pattern extends toward a second edge of said first substrate which is opposite said first edge.

10. (NEW) The apparatus of Claim 8 wherein said first substrate terminal and said second substrate terminal linearly extend away from said first edge of said first substrate.

11. (NEW) The apparatus of Claim 7 wherein said input terminal further comprises:

a first input terminal formed on said second substrate; and

a second input terminal formed on said second substrate outboard of said first input terminal.

12. (NEW) The apparatus of Claim 11 wherein said second electrode pattern is electrically connected to said second input terminal.

13. (NEW) The apparatus of Claim 11 wherein said first input terminal is disposed adjacent an edge of said second substrate.

14. (NEW) The apparatus of Claim 7 wherein said first substrate terminal is disposed adjacent an edge of said first substrate.

15. (NEW) The apparatus of Claim 7 wherein image data is supplied to said first electrode pattern and a scanning signal is supplied to said second electrode pattern.

16. (NEW) The apparatus of Claim 7 further comprising a driving integrated circuit mounted on said second substrate.

### REMARKS

The purpose of this preliminary amendment is to clarify the translation and to add new claims to provide Applicant with a scope of protection commensurate with its contribution to the art.

Favorable consideration of this application is respectfully requested.

Respectfully submitted,

Date: July 10, 2000

Harness, Dickey & Pierce, P.L.C.  
P.O. Box 828  
Bloomfield Hills, MI 48303  
(248) 641-1600

By: 

G. Gregory Schivley, Reg. No. 27,382  
Bryant E. Wade, Reg. No. 40,344  
Attorneys for Applicant

GGs/BEW/msm

534 Rec'd PCT/PTO 10 JUL 2000

Attorney Docket No. 9319S-000137

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Examiner: Unknown )  
 Applicant: Hiroki NAKAHARA, et al. )  
 Filed: Unknown ) REQUEST FOR  
 For: LIQUID-CRYSTAL DISPLAY APPARATUS ) APPROVAL OF DRAWING  
 ) CHANGES

Hon. Commissioner of Patents & Trademarks  
 Washington, D.C. 20231

**CERTIFICATE OF EXPRESS MAILING**

*I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231 on*

By July 13, 2000  
G. Gregory Schiuley

Sir:

The Examiner is respectfully requested to approve the proposed drawing changes highlighted in red on the attached photocopies.

Applicants will submit corrected drawings after receiving a Notice of Allowance for this application, providing that the Examiner approves the proposed change.

Favorable consideration of this request is respectfully requested.

Respectfully submitted,

Date: July 10, 2000

Harness, Dickey & Pierce, P.L.C.  
 P.O. Box 828  
 Bloomfield Hills, MI 48303  
 (248) 641-1600

By:


G. Gregory Schiuley  
 G. Gregory Schiuley, Reg. No. 27,382  
 Bryant E. Wade, Reg. No. 40,344  
 Attorneys for Applicant

GGS/BEW/msm



11/14

Fig. 11

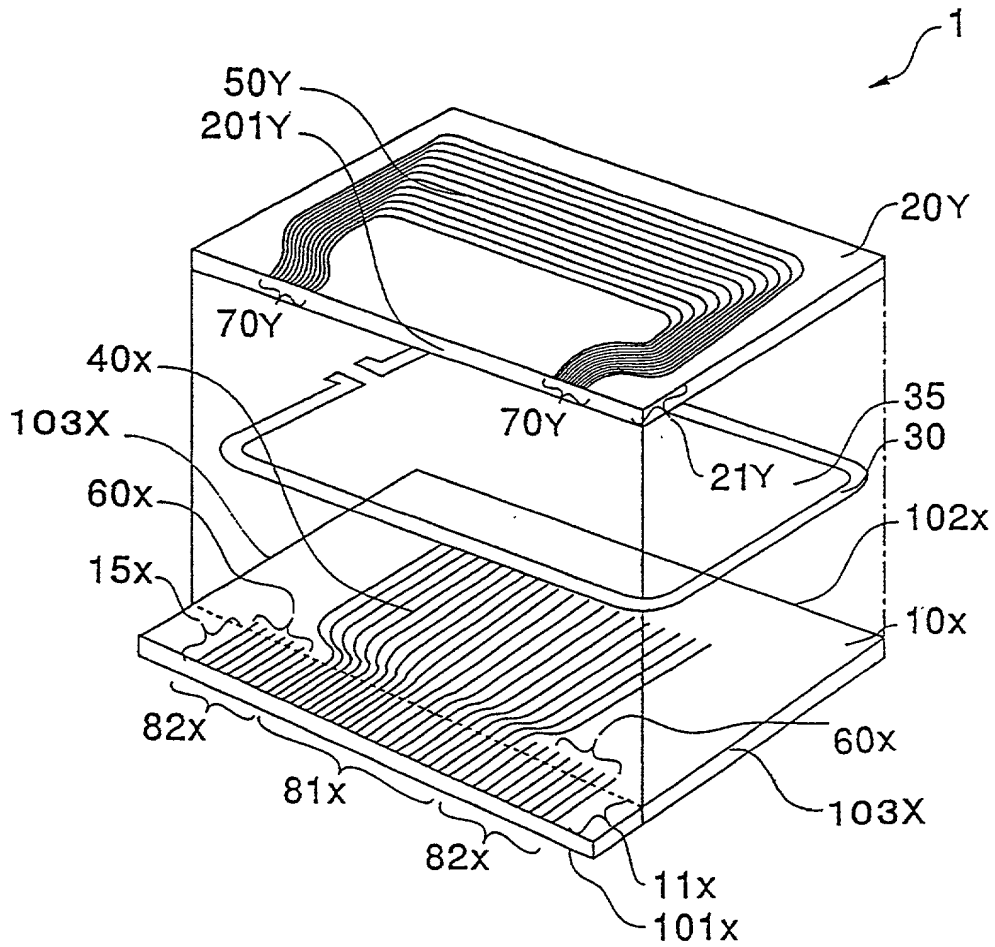PRIOR ART

12/14

Fig. 12 PRIOR ART

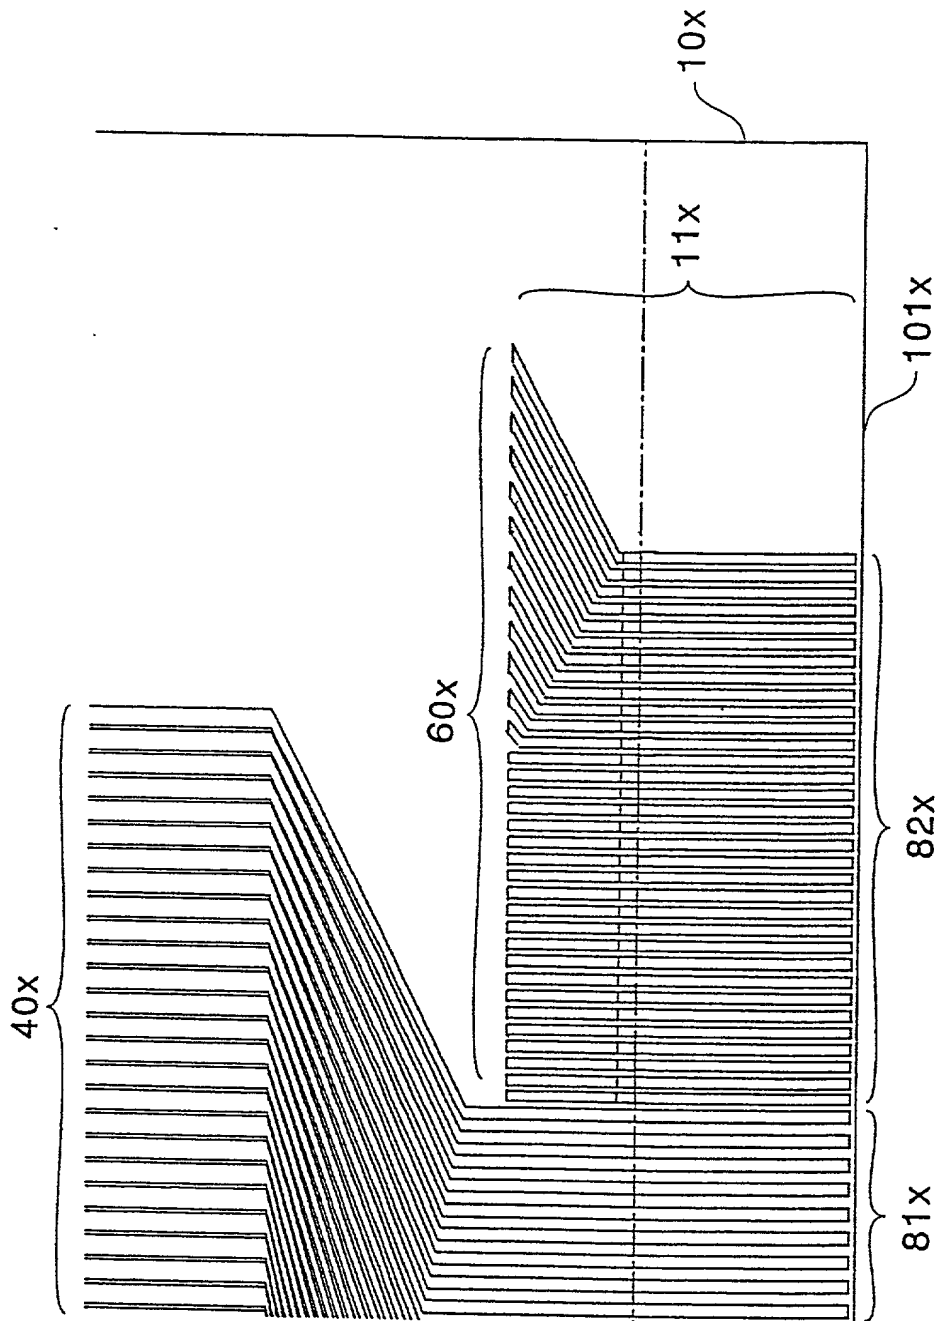


Fig. 13


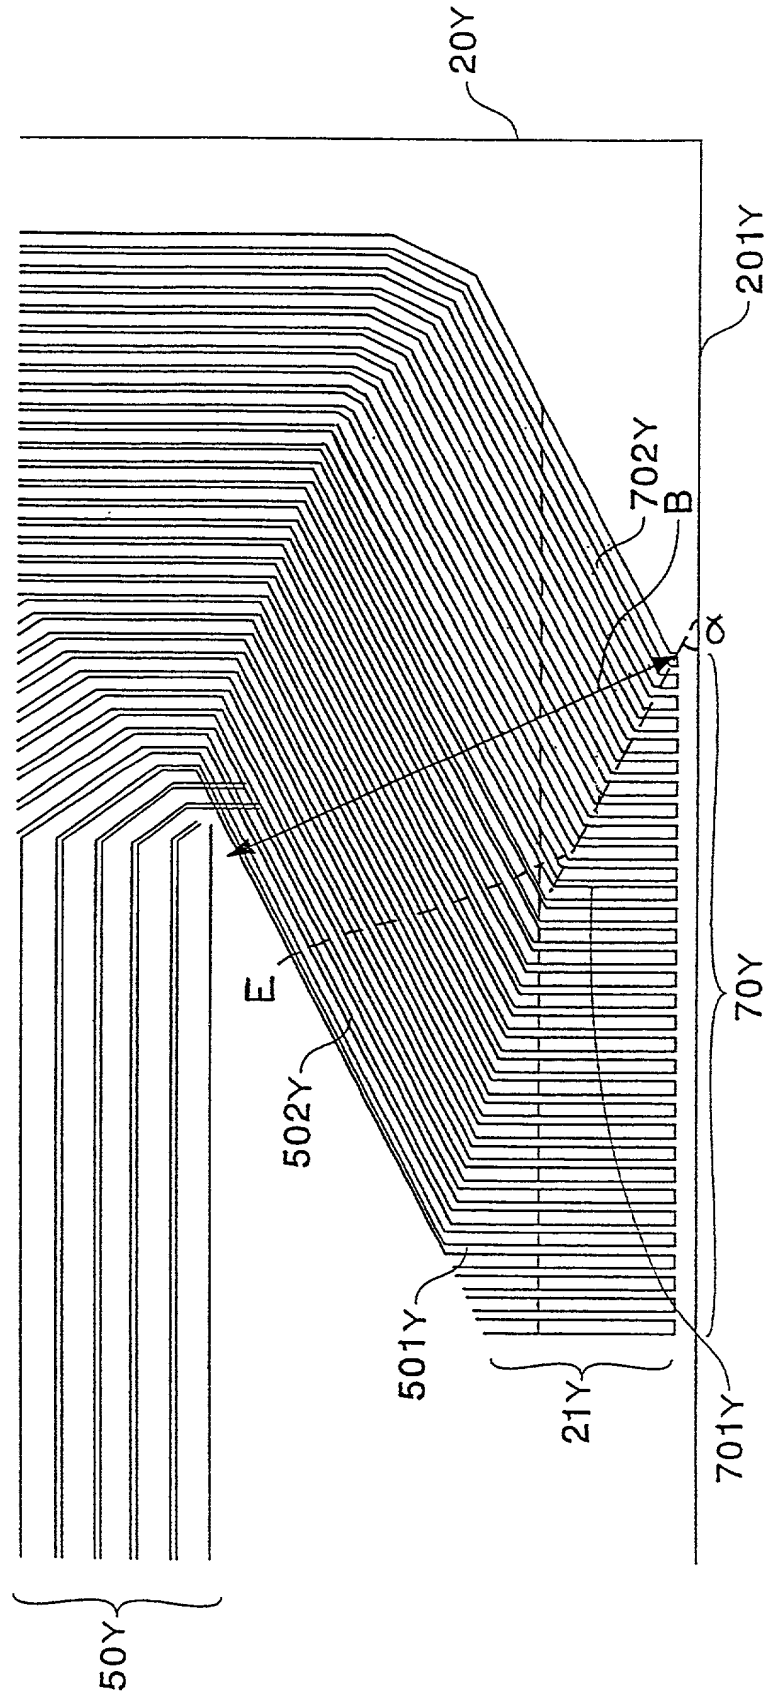


Fig. 14 PRIOR ART

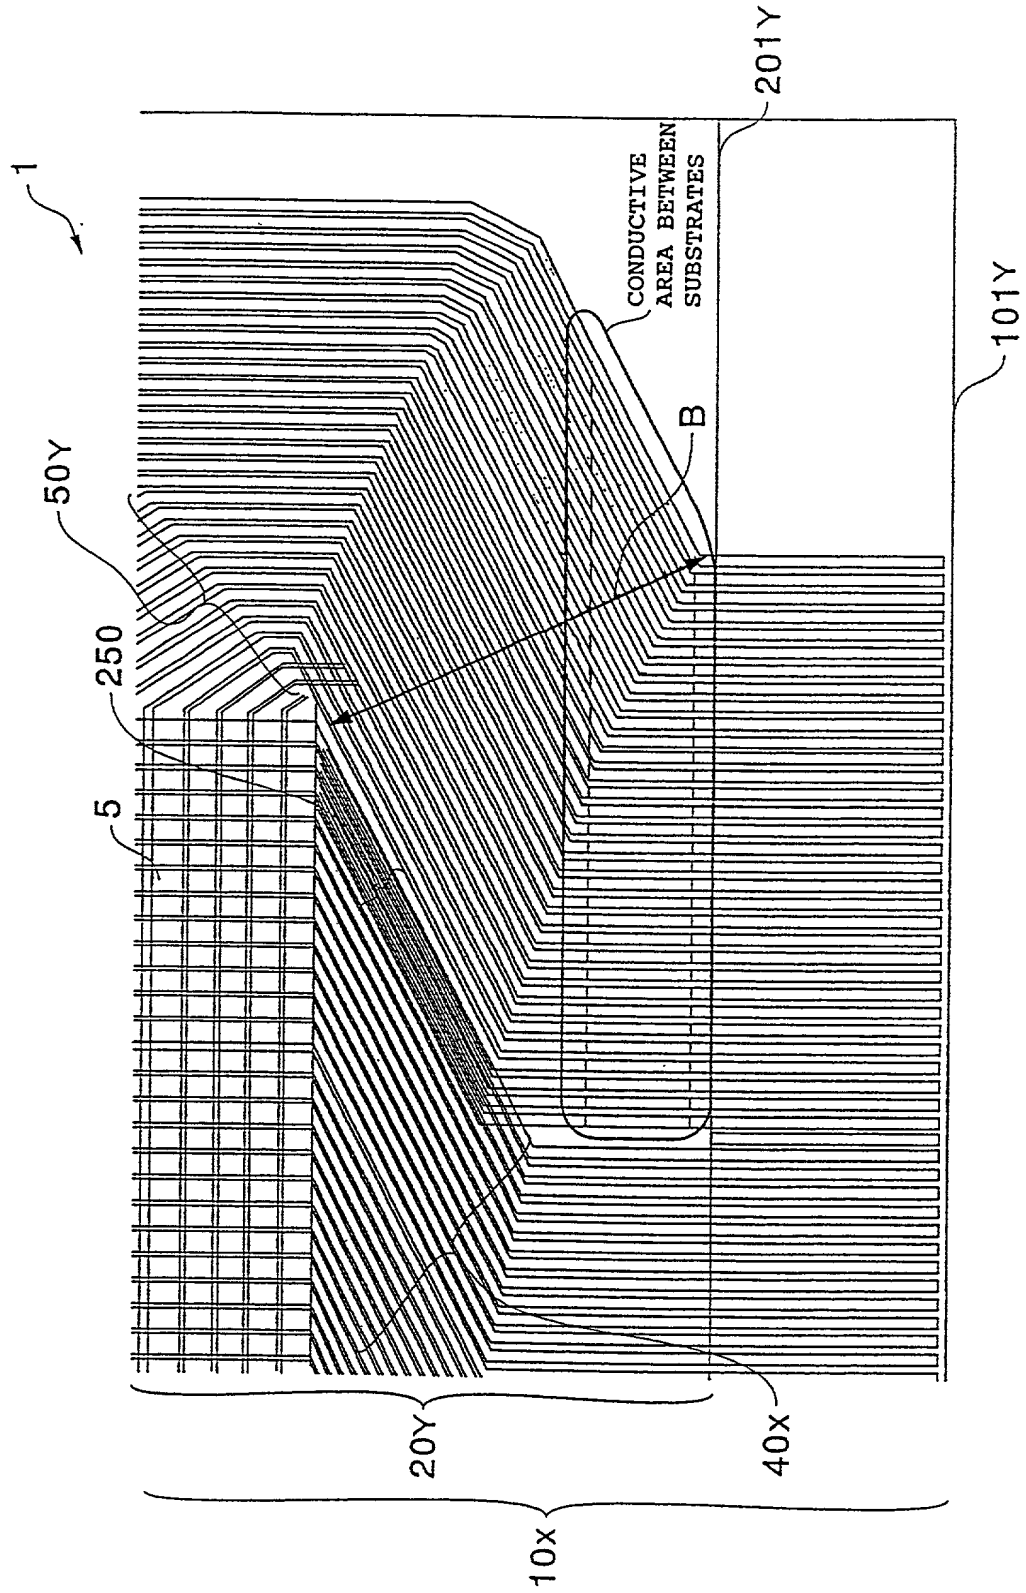

## DESCRIPTION

## LIQUID-CRYSTAL DISPLAY APPARATUS

## Technical Field

5 The present invention relates to a liquid-crystal display apparatus. More particularly, the present invention relates to electrode structures in each substrate of a liquid-crystal panel which is a constituent of a liquid-crystal display apparatus.

## Background Art

10 Fig. 11 is an exploded perspective view of a conventional liquid-crystal panel. Fig. 12 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a first substrate 10X of the liquid-crystal panel shown in Fig. 11. Fig. 12 is a plan view showing an  
15 enlargement of an electrode pattern and a terminal, which are formed on a second substrate 20Y of the liquid-crystal panel shown in Fig. 11. Fig. 14 is a plan view showing an enlargement of an electrode pattern and a terminal when the first substrate 10X shown in Fig. 12 and the second substrate  
20 20Y shown in Fig. 13 are laminated together.

Fig. 11 shows a passive-matrix-type liquid-crystal display apparatus, in which the first substrate 10X having

formed thereon a first electrode pattern 40X, and the second substrate 20Y having formed thereon a second electrode pattern 50Y are laminated together for driving a liquid crystal sandwiched between the first and second electrode patterns.

5 In such a passive-matrix-type liquid-crystal display apparatus, as schematically shown in Fig. 11 in exploded view, a liquid-crystal sealing area 35 is defined by a sealing material 30 between a pair of substrates which are laminated together by the sealing material 30 with a predetermined gap therebetween, and a liquid crystal is sealed inside this liquid-crystal sealing area 35.

10 In a liquid-crystal panel 1 having such a construction, the second electrode pattern 50Y and a terminal 82X for input from the outside are electrically connected to each other by placing a conductive material between a first terminal 60X for conduction between substrates and a second terminal 70X for conduction between substrates. As a result, it is possible to apply a signal for driving the liquid crystal from the terminal 82X for input from the outside, formed on the first substrate, to the second electrode pattern 50Y formed on the second substrate 20Y. In such a liquid-crystal panel 1, it is possible to input a signal for driving the liquid crystal to the first electrode pattern 40X and the second electrode pattern 50Y, which are formed on mutually different substrates, from the terminals 81X and 82X for input from the

outside, both of which are formed on the first substrate.

In the liquid-crystal panel shown in Fig. 11, the terminals 81X and 82X for input from the outside are formed in a first terminal formation area in proximity to a substrate edge 101X of the first substrate. The conduction between the first terminal 60X for conduction between substrates and a second terminal 70Y for conduction between substrates is made in the first terminal formation area and a second terminal formation area 21Y in proximity to a substrate edge 201X of the second substrate. Here, since the substrate edges 101X and 201Y are edges extending in the same direction, in order that the terminals 81X and 82X for input from the outside be connected to an external circuit, such as a driver for driving a liquid crystal, via a flexible substrate (not shown) or a rubber connector, or directly, one end of a first terminal formation area 11X is formed in a portion which does not overlap the substrate 20Y, that is, in a protruding portion 15X protruding from a substrate edge 201Y of the second substrate 20Y. Then, the terminals 81X and 82X for input from the outside, formed therein, are connected, in a portion near the substrate edge 101X, to an external circuit, such as a driver for driving a liquid crystal, via a flexible substrate (not shown) or a rubber connector, or directly. On the other hand, in order that the first terminal 60X for conduction between substrates and the second terminal 70Y for conduction

between substrates are made to electrically conduct with each other, the other end of the first terminal formation area 11X is extended to an area where it overlaps in plan view with a second terminal formation area 21Y of the second substrate 20Y.

Figs. 12 and 13 are plan views showing enlargements of parts of each terminal formation area which are respectively formed on the first substrate 10X and the second substrate 20Y which are used in the conventional liquid-crystal panel 1.

In Figs. 11 and 12, the first terminal formation area 11X formed along the substrate edge 101X of the first substrate 10X is formed with a plurality of first terminals 81X for input from the outside arrayed in the central area of the substrate edge 101X. Also, in an area corresponding to both sides (both ends) where the first terminals 81X for input from the outside is formed, a plurality of second terminals 82X for input from the outside, arrayed along the substrate edge 101X, are formed. Then, from the first terminals 81X for input from the outside, plural rows of first electrode patterns 40X for driving a liquid crystal are formed, and from the second terminal 82X for input from the outside, the first terminal 60X for conduction between substrates extends to a position at which it overlaps the second terminal formation area 21Y of the second substrate 20Y. The first electrode pattern 40X, the first terminals 81X for input from the outside, the



terminal 82X for input from the outside, and the first terminal 60X for conduction between substrates are all formed from an ITO film (Indium Tin Oxide/transparent conductive film), etc.

5        On the other hand, on the second substrate 20Y, as can be seen from Figs. 11 and 13, at a position corresponding to the first terminal 60X for conduction between substrates of the first substrate 10X within the second terminal formation area 21Y, plural second terminals 70Y for conduction between  
10        substrates are formed along the substrate edge 201Y. From these second terminals 70Y for conduction between substrates, there are formed plural rows of second electrode pattern 50Y for driving a liquid crystal, extending in such a manner as to go around an area corresponding to both sides of the area  
15        where the first electrode pattern 40X is formed and to intersect the first electrode pattern 40X within the liquid-crystal sealing area 35. The second electrode pattern 50Y and the second terminal 70Y for conduction between substrates are also formed from an ITO film, etc.

20        In the manner as described above, in the second substrate 20Y, the second electrode pattern 50Y must be extended from the second terminal 70Y for conduction between substrates in such a manner as to avoid the formation area of the first electrode pattern 40X formed on the first substrate 10X and to  
25        go around an area corresponding to both sides of the first

electrode pattern 40X. For this reason, the second terminal 70Y for conduction between substrates is formed linearly in an area (in the central area of the substrate edge 201Y) near the end portion of the formation area of the first electrode pattern 40X formed on the first substrate 10X; however, the farther therefrom toward either side, the larger the ratio at which the obliquely extending portion (oblique portion 702Y) occupies. However, the second terminal 70Y for conduction between substrates is, unlike the normal wiring portion, for making a conductive connection, by a conductive material sandwiched between the substrates, with the first terminal 60X for conduction between substrates, and therefore, a short-circuit is likely to occur between adjacent terminals. Therefore, to reliably prevent such a short-circuit between adjacent terminals, a sufficiently large spacing must be ensured between adjacent terminals. For this reason, in the second terminal 70Y for conduction between substrates formed in an area (on both sides of the substrate edge 201Y) away from the end portion of the formation area of the first electrode pattern 40X, the lengths of linear portions 701Y are varied greatly between adjacent terminals, and these are obliquely bent therefrom toward the side edges 103X of the substrate 10X in order to form wiring, so that the spacing between the oblique portions 702Y of the second terminal 70Y for conduction between substrates is secured to be wide.

Therefore, as can be seen from Fig. 13, an angle  $\alpha$  between the line E connecting the boundary between the linear portions 701Y and the oblique portions 702Y and the substrate edge 201Y in the second terminal 70Y for conduction between substrates is very large.

In contrast, in a portion where the second terminal 70Y for conduction between substrates extends straight to an area near the formation area of the first electrode pattern 40X, even if the second electrode pattern 50Y extending therefrom is oblique, conduction between substrates by a conductive material is not performed in this oblique portion 502Y, making it possible to significantly decrease the spacing between adjacent patterns. Therefore, the angle formed by the line connecting the boundary between the linear portions 501Y and the oblique portions 502Y with the substrate edge 201Y in the second electrode pattern 50Y is very small.

In constructing the liquid-crystal panel 1 by using the first substrate 10X and the second substrate 20Y formed in this manner, as shown in Figs. 11 and 14, when the first substrate 10X and the second substrate 20Y are laminated together via the sealing material 30, a gap material and a conductive material are mixed in advance in the sealing material 30, and the sealing material 30 is also formed by coating or by printing in an area where the first terminal 60X for conduction between substrates and the second terminal 70Y

for conduction between substrates overlap. Therefore, when the first substrate 10X and the second substrate 20Y are laminated together via the sealing material 30Y, the first terminal 60X for conduction between substrates comes into electrical conduction with the second terminal 70Y for conduction between substrates by the conductive material contained in the sealing material 30. Also, when the first substrate 10X and the second substrate 20Y are laminated together, pixels 5 are formed in a matrix by the intersecting portions of the first electrode pattern 40X and the second electrode pattern 50Y. As a result, after a flexible substrate is mounted by using an anisotropic conductive material, etc., at a position near the substrate edge 101X of the first terminal formation area 11X of the first substrate 10X, when a signal is input to the first terminals 81X for input from the outside and the second terminal 82X for input from the outside of the first substrate 10X via this flexible substrate, image data can be applied to the first electrode pattern 40X formed on the first substrate 10X via the first terminals 81X for input from the outside, and a scanning signal can be applied to the second electrode pattern 50Y formed on the second substrate 20Y via the first terminal 82X for input from the outside, the first terminal 60X for conduction between substrates, the conductive material, and the second terminal 70Y for conduction between substrates.

However, in the above-described conventional technology, conduction is performed by using an obliquely extending second terminal 70Y for conduction between substrates. For this reason, if attempts are made to obtain a terminal width of inter-substrate conduction terminals or the width between adjacent terminals which is sufficient to ensure the reliability of inter-substrate conduction, a substantial spacing must be provided in the oblique portions 702Y by greatly varying the lengths of the linear portions 701Y between adjacent terminals. That is, there is the problem of failing to utilize the area outside the display area. For this reason, in the conventional electrode structure, there is a problem in that the number of second electrode patterns 50Y and the number of second terminals 70Y for conduction between substrates, formed between (the area width indicated by the arrow B) the corner portion where the pattern positioned at the outermost part of the first electrode pattern 40X formed on the first substrate 10X is bent near the display area and the base-end portion of the terminal positioned at the outermost part in the second terminal formation area 21Y cannot be substantially increased. If the number of second electrode patterns 50Y and the number of second terminals 70Y for conduction between substrates were increased, as shown in Fig. 14, there is a problem in that, in an area 250, the second electrode pattern 50Y overlaps the first electrode

pattern 40X, increasing the probability of the occurrence of a short-circuit between substrates. Also, if the spacing of the oblique portions 702Y of the second terminal 70Y for conduction between substrates is decreased to secure an area in which the second electrode pattern 50Y is added for the purpose of increasing the number of second electrode patterns 50Y and the number of second terminals 70Y for conduction between substrates, this increases the probability that a short-circuit will occur between substrates. Furthermore, when an area where the second electrode pattern 50Y is added is secured by decreasing the area width indicated by the arrow B, for example, by decreasing the line width and spacing of the second electrode patterns 50Y and the second terminals 70Y for conduction between substrates, electrical resistance (wiring resistance) is increased, and display quality is decreased.

Accordingly, an object of the present invention is to provide a liquid-crystal panel of a type in which a signal is input from a terminal for input from the outside, formed on one substrate of a pair of substrates which hold a liquid crystal, and a signal is input to the other substrate by performing conduction between substrates by using a conductive material sandwiched between the substrates, so that the number of electrode patterns for driving a liquid crystal can be increased without decreasing reliability and display quality

by effectively using the wiring area of a non-display area.

#### Disclosure of the Invention

In order to solve the above-described problems, the present invention comprises: a first substrate having a first terminal for conduction between substrates, located adjacent to the edge of the substrate, and having a first electrode pattern which is electrically connected to the first terminal for conduction between substrates and which is arranged so as to extend toward an edge opposing the edge to which the first terminal for conduction between substrates is adjacent; and a second substrate having a first terminal for input from the outside located adjacent to the edge of the substrate, a second terminal for conduction between substrates, which is electrically connected to the first terminal for input from the outside, second terminals for input from the outside, located on both sides of the first terminal for input from the outside, and a second electrode pattern which is electrically connected to the second terminal for input from the outside, characterized in that the first substrate and the second substrate are located in an opposed manner so as to extend in a direction in which the first electrode pattern and the second electrode pattern intersect with each other, and the first terminal for conduction between substrates and the second terminal for conduction between substrates are

electrically connected to each other by a conductive material sandwiched between the first substrate and the second substrate.

In a first liquid-crystal display apparatus of the present invention, by forming a connection via a conductive material between the first terminal for conduction between substrates, formed on the first substrate, to the second terminal for conduction between substrates, formed on the second substrate, what is commonly called "conduction between substrates" is performed, in which the first electrode pattern on the first substrate and the first terminal for input from the outside on the second substrate are electrically connected to each other. In the present invention, when performing this conduction between substrates, the first electrode pattern formed so as to extend toward the edge opposing the edge in which the first terminal for conduction between substrates is formed is connected to the first terminal for input from the outside, formed on the second substrate. Also, the second electrode pattern formed so as to extend in a direction intersecting the first electrode pattern is connected to the second terminals for input from the outside, located on both sides of the first terminal for input from the outside without making conduction between substrates. According to this construction, since the first electrode pattern is used for conduction between substrates, the number of second electrode



patterns can be increased without concern for the reliability of conduction between substrates. This is because, even if the number of patterns of a portion (for example, A in Fig. 4), where the pattern must be extended obliquely, is increased, since this pattern is not a pattern used for conduction between substrates, it does not matter even if the width between adjacent patterns is decreased. Therefore, even if the number of second electrode patterns is increased, it is not necessary to decrease the spacing between the terminals for conduction between substrates, and it is not necessary to decrease the line width of the first pattern. Therefore, according to the present invention, the number of electrode patterns for driving a liquid crystal can be increased without decreasing reliability and display quality. Also, even when the number of second electrode patterns is not increased very much, since a portion where the pattern must be extended obliquely can be narrowed, it is possible to expand the display area in a liquid-crystal panel having outer dimensions equal to the conventional ones.

Furthermore, in the present invention, preferably, the first terminal for conduction between substrates and the second terminal for conduction between substrates are located linearly toward an edge opposing the edge to which the terminals are adjacent. That is, in an area where the first terminal for conduction between substrates and the second

terminal for conduction between substrates perform conduction between substrates, by forming the pattern into one which is not formed obliquely, the distance between terminals can be sufficiently secured, thereby improving the reliability of conduction between substrates.

Furthermore, in the present invention, preferably, image data is supplied to the first electrode pattern, and a scanning signal is supplied to the second electrode pattern. In the liquid-crystal device having such a construction, the first electrode pattern is used as a data electrode pattern by which image data is supplied, for example, via the first terminal for input from the outside, the second terminal for conduction between substrates, the conductive material, and the first terminal for conduction between substrates. The second electrode pattern is used as a scanning electrode pattern by which a scanning signal is applied via the second terminal for input from the outside.

A second liquid-crystal display apparatus of the present invention comprises: a first substrate having a first terminal for conduction between substrates, located adjacent to the edge of the substrate, and having a first electrode pattern which is electrically connected to the first terminal for conduction between substrates and which is arranged so as to extend toward an edge opposing the edge to which the first terminal for conduction between substrates is adjacent; and a

second substrate having an input terminal for input from the outside, located adjacent to the edge of the substrate, a second terminal for conduction between substrates, and a second electrode pattern, the substrates located in an opposed manner so as to extend in a direction in which the first electrode pattern and the second electrode pattern intersect with each other, characterized by having a driving IC, mounted on the second substrate, an input terminal being electrically connected to the terminal for input from the outside, and an output terminal being electrically connected to the second terminal for conduction between substrates and the second electrode pattern, and characterized in that the first terminal for conduction between substrates and the second terminal for conduction between substrates are electrically connected to each other by a conductive material sandwiched between the first substrate and the second substrate.

In the second liquid-crystal display apparatus of the present invention, what is commonly called "conduction between substrates" is performed, in which the first terminal for conduction between substrates, formed on the first substrate, and the second terminal for conduction between substrates, formed on the second substrate, are connected to each other by a conductive material. For this reason, the first electrode pattern on the first substrate is connected to the output terminal of a driving IC, mounted onto the second substrate,

via the first and second terminals for conduction between substrates. In the present invention, when performing this conduction between substrates, the first electrode pattern is used, which is formed so as to extend toward the edge opposing the edge in which the first terminal for conduction between substrates is formed. Also, the second electrode pattern arranged so as to extend in a direction intersecting the first electrode pattern is connected to the output terminal of the driving IC without making conduction between substrates. According to this construction, since the first electrode pattern is used for conduction between substrates, the number of second electrode patterns can be increased without concern for the reliability of conduction between substrates. The reason for this is that even if the number of patterns of a portion (for example, A in Fig. 4) where the pattern must be extended obliquely is increased, since this pattern is not a pattern used for conduction between substrates, it does not matter even if the width between adjacent patterns is decreased. Therefore, even if the number of second electrode patterns is increased, it is not necessary to decrease the spacing between the terminals for conduction between substrates, and it is not necessary to decrease the line width of the first pattern. Therefore, according to the present invention, the number of electrode patterns for driving a liquid crystal can be increased without decreasing reliability

and display quality.

Furthermore, in the second liquid-crystal display apparatus of the present invention, various types of constructions for use with the above-described first liquid-crystal display apparatus can be employed; for example, the following can be employed:

(1) The first terminal for conduction between substrates and the second terminal for conduction between substrates are formed linearly toward the edge opposing the edge in which the terminals are formed.

(2) Image data is supplied to the first electrode pattern, and a scanning signal is supplied to the second electrode pattern.

The operation and effects by the above-described (1) and (2) are comparable to those of the above-described first liquid-crystal display apparatus of the present invention, and accordingly, descriptions thereof are omitted here.

#### Brief Description of the Drawings

Fig. 1 is a perspective view showing the exterior of a liquid-crystal panel used in a liquid-crystal display apparatus according to a first embodiment of the present invention.

Fig. 2 is a perspective view schematically showing the state in which the liquid-crystal panel shown in Fig. 1 is

exploded.

Fig. 3 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a first substrate of the liquid-crystal panel shown in Fig. 2.

5 Fig. 4 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a second substrate of the liquid-crystal panel shown in Fig. 2.

Fig. 5 is a plan view showing an enlargement of an electrode pattern and a terminal when the first substrate shown in Fig. 3 and the second substrate shown in Fig. 4 are laminated together.

Fig. 6 is a perspective view showing the exterior of a liquid-crystal panel used in a liquid-crystal display apparatus according to a second embodiment of the present invention.

Fig. 7 is a perspective view schematically showing a state in which the liquid-crystal panel shown in Fig. 6 is exploded.

20 Fig. 8 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a first substrate of the liquid-crystal panel shown in Fig. 7.

Fig. 9 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a second substrate of the liquid-crystal panel shown in Fig. 7.

25 Fig. 10 is a plan view showing an enlargement of an

electrode pattern and a terminal when the first substrate shown in Fig. 8 and the second substrate shown in Fig. 9 are laminated together.

Fig. 11 is an exploded perspective view of a conventional liquid-crystal panel.

Fig. 12 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a first substrate of the liquid-crystal panel shown in Fig. 11.

Fig. 13 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a second substrate of the liquid-crystal panel shown in Fig. 11.

Fig. 14 is a plan view showing an enlargement of an electrode pattern and a terminal when the first substrate shown in Fig. 12 and the second substrate shown in Fig. 13 are laminated together.

#### Best Mode for Carrying out the Invention

Embodiments of the present invention are described with reference to the accompanying drawings.

#### First Embodiment

##### (Overall construction)

Fig. 1 is a perspective view showing the exterior of a liquid-crystal panel used in a liquid-crystal display apparatus according to this embodiment. Fig. 2 is a

perspective view schematically showing a state in which this liquid-crystal panel is exploded. Fig. 3 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a first substrate of the liquid-crystal panel shown in Fig. 2. Fig. 4 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a second substrate of the liquid-crystal panel shown in Fig. 2. Since in Figs. 1 and 2, an electrode pattern, a terminal, etc., are merely shown schematically, details thereof will be described later with reference to Figs. 3 and 4 showing enlargements of parts of an electrode pattern and a terminal.

In Figs. 1 and 2, a liquid-crystal panel 1 used in a passive-matrix-type liquid-crystal display apparatus mounted in an electronic equipment, such as a portable telephone, is formed so that a first substrate 10 and a second substrate 20, formed of glass, plastic, etc., are laminated together with a predetermined gap therebetween in an opposed manner via a sealing material 30. A liquid crystal is sealed within a liquid-crystal sealing area 35 defined by the sealing material 30. The first substrate 10 is formed with plural rows of first electrode patterns 40 extending in the vertical direction within the liquid-crystal sealing area 35, and the second substrate 20 is formed with plural rows of second electrode patterns 50 extending in the horizontal direction



within the liquid-crystal sealing area 35.

In the liquid-crystal panel 1 shown herein, a polarizer 5 is laminated on the outer surface of the second substrate 20 by an adhesive, etc., and a polarizer 6 is also laminated on the outer surface of the first substrate 10 by an adhesive, etc. When the liquid-crystal panel 1 is formed to be of the reflective type, a reflecting plate (not shown) is laminated on the outer side of the polarizers 5 and 6, or a reflecting plate is laminated in place of the polarizers 5 and 6.

In the liquid-crystal panel 1 constructed as described above, first and second terminals 81 and 82 for input from the outside are formed in the second terminal formation area in proximity to a substrate edge 201 of the second substrate. Then, the conduction between a first terminal 60 for conduction between substrates and a second terminal 70 for conduction between substrates is made in a first terminal formation area 11 and a second terminal formation area 21 in proximity to a substrate edge 101 of the first substrate. Here, since the first substrate edges 101 and 102 are edges extending in the same direction, in order that the first and second terminals 81 and 82 for input from the outside be connected to an external circuit, such as a driver for driving a liquid crystal, via a flexible substrate (not shown) or a rubber connector, or directly, one end of the second terminal formation area 21 is formed in a portion which does not

overlap the substrate 10, that is, in a protruding portion protruding from the substrate edge 101 of the first substrate 10. For this reason, as the second substrate 20, a substrate larger than the first substrate 10 is used. On the other  
5 hand, in order that the first terminal 60 for conduction between substrates and the second terminal 70 for conduction between substrates be electrically conductive with each other, the other end of the second terminal formation area 21 is extended up to an area where it overlaps in plan view with the  
10 first terminal formation area 11 of the first substrate 10.

In this embodiment, as shown in Figs. 2 and 3, the first terminal formation area 11 is formed along the central portion of the substrate edge 101 of the first substrate 10, and in this first terminal formation area 11, a plurality of first  
15 terminals 60 for conduction between substrates are arrayed with a predetermined spacing along the substrate edge 101. Also, on the first substrate 10, plural rows of first electrode patterns 40 for driving a liquid crystal extend obliquely, spreading toward both sides, from the first  
20 terminal 60 for conduction between substrates toward the substrate edge 102, after which the first electrode patterns 40 extend in a direction intersecting the substrate edges 101 and 102 at right angles within the liquid-crystal sealing area 35. Here, the first electrode pattern 40 and the first  
25 terminal 60 for conduction between substrates are formed from

an ITO film formed in a predetermined pattern.

As shown in Figs. 2 and 4, on the second substrate 20, the second terminal formation area 21 is also formed along a substrate edge 201, and this second terminal formation area 21 is formed over a relatively broad area, excluding both ends of the substrate edge 201. The second terminal formation area 21 is formed with plural first terminals 81 for input from the outside arrayed with a predetermined spacing along the substrate edge 201 in the central area of the second terminal formation area 21, and plural second terminals 82 for input from the outside arrayed with a predetermined spacing along the substrate edge 201 in the two places on both sides of the area where these first terminals 81 for input from the outside are formed. Here, the first terminals 81 for input from the outside and the second terminals 82 for input from the outside are all extended toward an opposing substrate edge 202 (see Fig. 2) in the second terminal formation area 21.

Also, on the second substrate 20, from the first terminals 81 for input from the outside, plural second terminals 70 for conduction between substrates which overlap the first terminal 60 for conduction between substrates when the first substrate 10 and the second substrate 20 are laminated together extend linearly toward the substrate edge 202.

Furthermore, on the second substrate 20, from the second

terminal 82 for input from the outside, plural rows of second electrode patterns 50 for driving a liquid crystal are formed to go around an area corresponding to both sides of the formation area of the first electrode pattern 40 when the first substrate 10 and the second substrate 20 are laminated together. Then, these second electrode patterns 50 extend so as to intersect the first electrode pattern 40 within the liquid-crystal sealing area 35. That is, the wiring of the second electrode patterns 50 formed on the second substrate 20, in each area corresponding in plan view to both sides of the area where the first electrode pattern 40 on the first substrate 10 is formed when the first substrate 10 and the second substrate 20 are laminated together, extend obliquely toward a side edge 203 in each of the sides, after which the wiring extends linearly toward the opposing substrate edge 202 along the liquid-crystal sealing area 35 (or the side edge 203 of the substrate 20), and after an appropriate place, the wiring extends in parallel with the substrate edges 201 and 202 within the liquid-crystal sealing area 35. Here, the second electrode pattern 50, the first terminals 81 for input from the outside, the second terminal 82 for input from the outside, and the second terminal 70 for conduction between substrates are all formed from an ITO film formed in a predetermined pattern.

In constructing the liquid-crystal panel 1 by using the

first substrate 10 and the second substrate 20 formed in this manner, in this embodiment, when the first substrate 10 and the second substrate 20 are laminated together via the sealing material 30, a gap material and a conductive material are

5 mixed in advance in the sealing material 30, and the sealing material 30 is also formed in an area where the first terminal 60 for conduction between substrates and the second terminal 70 for conduction between substrates overlap each other.

Here, the conductive material contained in the sealing

10 material 304 is metallic particles or particles for plating to be performed on the surfaces of elastically deformable plastic beads. In the case of particles for plating to be performed on the surfaces of elastically deformable plastic beads, the particle diameter thereof is approximately 6.6  $\mu\text{m}$ . In

15 contrast, the particle diameter of the gap material contained in the sealing material 304 is approximately 5.6  $\mu\text{m}$ .

Therefore, when the sealing material 30 is melted and cured while applying a pressing force such as that which decreases a gap between the first substrate 10 and the second substrate 20

20 in a state in which these substrates are stacked one on the other, the conductive material causes the first terminal 60 for conduction between substrates to be electrically conductive with the second terminal 70 for conduction between substrates in a state in which the conductive material is

25 crushed between the first substrate 10 and the second

substrate 20.

Fig. 5 is a plan view showing an enlargement of an electrode pattern and a terminal when the first substrate shown in Fig. 3 and the second substrate shown in Fig. 4 are laminated together.

As shown in Fig. 5, when the first substrate 10 and the second substrate 20 are laminated together via the sealing material 30, pixels 5 are formed in a matrix by the intersecting portions of the first electrode patterns 40 and the second electrode patterns 50. As a result, after a flexible substrate 90 is mounted in the end portion adjacent to the substrate edge 201 of the second terminal formation area 21 of the second substrate 20 by using an anisotropic conductive material, etc., when a signal is input to the first terminals 81 for input from the outside and the second terminal 82 for input from the outside of the second substrate 20 via an external circuit, etc., such as this flexible substrate 90, a scanning signal can be applied to the second electrode pattern 50 formed on the second substrate 20 via the second terminal 82 for input from the outside, and image data signals can be input to the first electrode pattern 40 formed on the first substrate 10 via the first terminals 81 for input from the outside, the second terminals 70 for conduction between substrates, the conductive material, and the first terminal 60 for conduction between substrates. Therefore,

since the image data and the scanning signal allow the orientation state of the liquid crystal positioned between the first electrode patterns 40 and the second electrode patterns 50 in each pixel 5 to be controlled, a predetermined image can be displayed.

Conventionally, for the first electrode patterns 40 in the vertical direction, a signal is input directly from a terminal for input from the outside without vertical conduction between substrates, and for the second electrode pattern 50 in the horizontal direction which is extended around to both sides so as to avoid this first electrode pattern 40, a signal is input via a terminal extending obliquely for conduction between substrates. In this embodiment, in contrast, a signal is input directly to the second electrode pattern 50 in the horizontal direction which is extended to both sides so as to avoid the first electrode pattern 40, from the second terminal 82 for input from the outside without vertical conduction between substrates. On the other hand, a signal is input to the first electrode pattern 40 in the vertical direction via conduction between substrates from the first terminals 81 for input from the outside. For this reason, it is not necessary to obliquely form the terminal for conduction between substrates, and therefore, the first terminal 60 for conduction between substrates and the second terminal 70 for conduction between

substrates can be formed linearly. That is, since there is no need to perform conduction between substrates in a portion (an area (area width indicated by arrow A) where the pattern must be formed obliquely between the corner portion where the pattern positioned at the innermost part of the second electrode patterns 50 is bent near the display area and the corner portion where the pattern positioned at the outermost part of the second electrode patterns 50 is bent near the display area) where the pattern must be extended obliquely, stable connection is ensured, and connection reliability is improved. Also, in the portion where the pattern must be extended obliquely, the distance (pitch distance) between patterns can be decreased, and the second electrode pattern 50, formed so as to have a narrow pitch, is formed. For this reason, in the second electrode pattern 50, the length of a linear portion 501 need only be varied slightly between adjacent patterns and be bent obliquely therefrom, allowing the spacing between oblique portions 502 of the second electrode pattern 50 to be decreased. Therefore, as can be seen from Fig. 4, even in such an area, in which there is a severe limitation on the layout, a large number of patterns can be formed by an amount corresponding to the angle  $\beta$  formed by the line F connecting the boundary between the linear portion 501 and the oblique portion 502 in the second electrode pattern 50 with the substrate edge 201 being small.



Therefore, even when the number of patterns formed in such an area, in which there is a severe limitation on the layout, is to be increased, it is not necessary to decrease the spacing between the first terminal 60 for conduction between

5 substrates and the second terminal 70 for conduction between substrates, and it is not necessary to decrease the line width of the patterns. Therefore, according to this embodiment, it is possible to increase the number of electrode patterns for driving a liquid crystal without decreasing reliability and display quality. Furthermore, in the liquid-crystal panel in which vertical conduction between substrates is required, since the portion where the pattern must be extended obliquely on the second substrate 20 can be narrowed more than in the conventional case if the number of patterns is equal, the  
10 outer shape can be formed to be smaller. In the liquid-crystal panel 1 of a size having the same outer dimensions, a larger expanded display area can be provided. Furthermore, if the portion where the pattern must be extended obliquely can be narrowed more than in the conventional case on the second  
15 substrate 20, the outer dimensions of the liquid-crystal panel 1 can be decreased in the liquid-crystal panel 1 of a size having a display area equal to that of a conventional one.  
20

#### Second Embodiment

On the liquid-crystal panel 1, there are cases in which a

driving IC is COG (Chip on Glass)-mounted or COP (Chip on Plastic Panel)-mounted on a substrate. In this case, a signal is input to the driving IC from the outside, and an image data signal and a scanning signal are output to each electrode pattern from the driving IC. Cases in which the present invention is applied to a liquid-crystal panel of such a type are described with reference to Figs. 6, 7, 8, 9, and 10.

Fig. 6 is a perspective view showing the exterior of a liquid-crystal panel used in a liquid-crystal display apparatus according to this embodiment. Fig. 7 is a perspective view schematically shows a state in which this liquid-crystal panel is exploded. Fig. 8 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a first substrate of the liquid-crystal panel shown in Fig. 7. Fig. 9 is a plan view showing an enlargement of an electrode pattern and a terminal, which are formed on a second substrate of the liquid-crystal panel shown in Fig. 7. Since in Figs. 6 and 7, an electrode pattern, a terminal, etc., are merely shown schematically, details thereof will be described later with reference to Figs. 8 and 9 showing enlargements of parts of an electrode pattern and a terminal.

In Figs. 6 and 7, the liquid-crystal panel 1 of this embodiment is formed so that a first substrate 10 and a second substrate 20, formed from glass, plastic, etc., are laminated

together with a predetermined gap therebetween in an opposed manner via a sealing material 30. A liquid crystal is sealed within a liquid-crystal sealing area 35 defined by the sealing material 30. The first substrate 10 is formed with plural rows of first electrode patterns 40 extending in the vertical direction within the liquid-crystal sealing area 35, and the second substrate 20 is formed with plural rows of second electrode patterns 50 extending in the horizontal direction within the liquid-crystal sealing area 35. In the liquid-crystal panel 1 shown herein, a polarizer 5 is laminated on the outer surface of the second substrate 20, and a polarizer 6 is also laminated on the outer surface of the first substrate 10. When the liquid-crystal panel 1 is formed to be of the reflective type, a reflecting plate (not shown) is laminated on the outer side of the polarizers 5 and 6 or a reflecting plate is laminated in place of the polarizers 5 and 6.

In the liquid-crystal panel 1 constructed as described above, when either signal input from the outside or conduction between substrates is performed, a first terminal formation area 11 and a second terminal formation area 21 respectively formed on the first substrate 10 and the second substrate 20 are used. Therefore, as the second substrate 20, a substrate larger than the first substrate 10 is used, and connection of the flexible substrate 90 or a rubber connector (not shown),

such as conductive rubber, is performed by using the protruding portion of the second substrate 20 protruding from the substrate edge 101 of the first substrate 10 when the first substrate 10 and the second substrate 20 are stacked by being laminated together.

In constructing such a connection structure, in this embodiment, as shown in Figs. 7 and 8, on the first substrate 10, the first terminal formation area 11 is formed along the central portion of the substrate edge 101 of the first substrate 10, and in this first terminal formation area 11, plural first terminals 60 for conduction between substrates are arrayed with a predetermined spacing along the substrate edge 101. Also, on the first substrate 10, plural rows of first electrode pattern 40 for driving a liquid crystal extend obliquely in such a manner as to spread toward both sides toward the opposing substrate edge 102 from the first terminal 60 for conduction between substrates, after which the first electrode patterns 40 are extended in a direction intersecting the substrate edges 101 and 102 at right angles within the liquid-crystal sealing area 35.

As shown in Figs. 7 and 9, on the second substrate 20, the second terminal formation area 21 is also formed along the substrate edge 201. This second terminal formation area 21 is formed over a relatively broad area, excluding both ends of the substrate edge 201, and this second terminal formation

area is formed with plural terminals 80 for input from the outside arrayed with a predetermined spacing along the substrate edge 201. The terminals 80 for input from the outside extend linearly toward the opposing substrate edge 202 (see Fig. 7) in the second terminal formation area 21. The driving IC 8 for supplying image data to the first electrode patterns 40 and for supplying the second electrode patterns 50 is mounted in a protruding portion 25. The input terminal of the driving IC 8 is connected to a terminal 80 for input from the outside (the connection portion of the terminal 80 for input from the outside and the driving IC is omitted), and a signal from outside the liquid-crystal panel 1 is input from the terminal 80 for input from the outside to the driving IC 8. The output terminals of the driving IC are connected to the first electrode patterns 40 via the second electrode patterns 50, and the first and second first terminals 60 and 70 for conduction between substrates.

In this embodiment, on the second substrate 20, a semiconductor (IC) mounting area 7 is formed in an adjacent area in the liquid-crystal sealing area 35 with respect to the terminal 80 for input from the outside, with the driving IC 8 being mounted in this semiconductor (IC) mounting area 7. From the output terminals (terminals positioned in the central area of the second terminal formation area 21) of the driving IC 8 located in the longitudinal central area of this

semiconductor (IC) mounting area 7, plural second terminals 70 for conduction between substrates are formed so as to be wired linearly toward the substrate edge 202 up to the position which corresponds to and overlaps the first terminal 60 for conduction between substrates when the first substrate 10 and the second substrate 20 are laminated together. (The connection portion of the second terminal 70 for conduction between substrates, a linear portion 501 of the second electrode pattern 50, and a driving IC is omitted). Also, from the output terminal (the terminal positioned in the both side areas of the second terminal formation area 21) of the driving IC located in longitudinal both side areas of the semiconductor (IC) mounting area 7, plural rows of second electrode patterns 50 for driving a liquid crystal are formed via the oblique portion 502 from the linear portion 501 in such a manner as to go around the area corresponding to both sides of the formation area of the first electrode pattern 40 when the first substrate 10 and the second substrate 20 are laminated together, and these second electrode patterns 50 extend so as to intersect the first electrode pattern 40 within the liquid-crystal sealing area 35.

In constructing the liquid-crystal panel 1 by using the first substrate 10 and the second substrate 20 formed in this manner, in this embodiment, when the first substrate 10 and the second substrate 20 are laminated together via the sealing

material 30, a gap material and a conductive material are mixed in advance in the sealing material 30, and the sealing material 30 is also formed in an area where the first terminal 60 for conduction between substrates and the second terminal 70 for conduction between substrates overlap each other.

Therefore, when the sealing material 30 is melted and cured while applying a force to narrow a gap between the first substrate 10 and the second substrate 20 in a state in which these substrates are stacked one on the other, the conductive material causes the first terminal 60 for conduction between substrates to electrically conduct with the second terminal 70 for conduction between substrates in a state in which the conductive material is pressed or crushed between the first substrate 10 and the second substrate 20.

Fig. 10 is a plan view showing an enlargement of an electrode pattern and a terminal when the first substrate shown in Fig. 8 and the second substrate shown in Fig. 9 are laminated together.

As shown in Fig. 10, when the first substrate 10 and the second substrate 20 are laminated together via the sealing material 30, pixels 5 are formed in a matrix by the intersecting portions of the first electrode patterns 40 and the second electrode patterns 50. As a result, after a flexible substrate 90 is mounted in the end portion adjacent to the substrate edge 201 of the second terminal formation

area 21 of the second substrate 20 by using an anisotropic  
conductive material, etc., when a signal is input to the first  
terminals 80 for input from the outside via this flexible  
substrate 90, a scanning signal can be applied to the second  
5 electrode patterns 50 from the driving IC 8, and image data  
signals can be input to the first electrode pattern 40 formed  
on the first substrate 10 from the driving IC 8 via the second  
terminal 70 for conduction between substrates, the conductive  
material, and the first terminal 60 for conduction between  
10 substrates. Therefore, since the image data and the scanning  
signal allow the orientation state of the liquid crystal  
positioned between the first electrode patterns 40 and the  
second electrode patterns 50 in each pixel 5 to be controlled,  
a predetermined image can be displayed.

15 In the manner as described above, conventionally, for the  
first electrode patterns 40 in the vertical direction, a  
signal is input directly from the terminal for input from the  
outside, and for the second electrode pattern 50 in the  
horizontal direction, which is extended to both sides so as to  
20 avoid this first electrode pattern 40, a signal is input via  
the terminal extending obliquely for conduction between  
substrates. In this embodiment, for the second electrode  
pattern 50 in the horizontal direction, which is extended to  
both sides so as to avoid this first electrode pattern 40, a  
25 signal is input directly from the driving IC 8, so that when a



signal is input by conduction between substrates, the first terminal 60 for conduction between substrates and the second terminal 70 for conduction between substrates, which perform conduction between substrates, can be formed linearly.

5 In the manner as described above, for the first electrode patterns 40 in the vertical direction, a signal is input by conduction between substrates via the second substrate 2. Therefore, there is no need to perform conduction between substrates in an area (area where the pattern must be formed  
10 obliquely between the corner portion where the pattern positioned at the innermost part of the second electrode patterns 50 is bent near the display area and the corner portion of the pattern positioned at the outermost part of the second electrode patterns 50 (area width indicated by arrow  
15 A)) where the pattern must be formed obliquely, and in that portion, only the second electrode pattern 50 can be formed to decrease the distance between patterns. For this reason, in the second electrode patterns 50, the length of a linear portion 501 need only be varied slightly between the adjacent  
20 patterns and be bent obliquely therefrom, allowing the spacing between oblique portions 502 of the second electrode pattern 50 to be decreased. Therefore, as can be seen from Fig. 9, even in such an area, in which there is a severe limitation on the layout, a large number of patterns can be formed by an  
25 amount corresponding to the angle  $\beta$  formed by the line F

connecting the boundary between the linear portion 501 and the oblique portion 502 in the second electrode pattern 50 with the substrate edge 201 being small. Therefore, even when the number of patterns formed in such an area, in which there is a severe limitation on the layout, is to be increased, it is not necessary to decrease the spacing between the first terminal 60 for conduction between substrates and the second terminal 70 for conduction between substrates. Furthermore, it is not necessary to decrease the line width of patterns. Therefore, according to this embodiment, the number of electrode patterns for driving a liquid crystal can be increased without decreasing reliability and display quality. In other words, if the number of patterns is equal, since the portion where the pattern must be extended obliquely on the second substrate 20 can be narrowed more than that in a conventional one, in a liquid-crystal panel 1 having a size in which the outer dimensions are equal, the display area can be expanded. Furthermore, if the portion where the pattern must be extended obliquely on the second substrate 20 can be narrowed more than that in a conventional one, in the liquid-crystal panel 1 having a size in which the display area is equal to that in a conventional one, the outer dimensions thereof can be decreased.

### Other Embodiments

In the first embodiment, both the first electrode pattern 40 and the second electrode pattern 50 are constructed in such a way that image data or a scanning signal is supplied from an external driving IC, which is provided outside the liquid-crystal panel, via the terminals 81 and 82 for input from the outside. In the second embodiment, both the first electrode pattern 40 and the second electrode pattern 50 are constructed in such a way that image data and a scanning signal are supplied from the driving IC 8 mounted on the second substrate. In the case of a construction in which, for the first electrode pattern, a signal is input by using conduction between substrates, the first embodiment and the second embodiment may be combined. That is, the construction may also be formed in such a way that image data is applied to the first electrode pattern 40 by using conduction between substrates from the driving IC, mounted on a glass substrate or a plastic substrate, and a scanning signal is applied to the other second electrode pattern 50 from an external driving IC outside the liquid-crystal panel.

Although the flexible substrate 90 is connected to the terminals 80, 81, and 82 for input from the outside, other circuit substrates may be connected thereto via a rubber connector, etc.

CLAIMS

1. A liquid-crystal display apparatus comprising:

5 a first substrate having a first terminal for conduction between substrates, located adjacent to the edge of the substrate, and having a first electrode pattern which is electrically connected to said first substrate for conduction between substrates and which is arranged so as to extend toward an edge opposing the edge to which said first substrate for conduction between substrates is adjacent; and

10 a second substrate having a first terminal for input from the outside located adjacent to the edge of the substrate, a second terminal for conduction between substrates, which is electrically connected to said first terminal for input from the outside, a second terminal for input from the outside, located on both sides of said first terminal for input from the outside, and a second electrode pattern which is electrically connected to said second terminal for input from the outside,

15 characterized in that said first substrate and said second substrate are located in an opposed manner so as to extend in a direction in which said first electrode pattern and said second electrode pattern intersect with each other, and

said first terminal for conduction between substrates and

said second terminal for conduction between substrates are  
25 electrically connected to each other by a conductive material  
sandwiched between said first substrate and said second  
substrate.

2. A liquid-crystal display apparatus according to claim  
1,

characterized in that said first terminal for  
conduction between substrates and said second terminal for  
5 conduction between substrates are located linearly toward an  
edge opposing the edge to which the terminals are adjacent.

3. A liquid-crystal display apparatus according to claim  
1,

characterized in that image data is supplied to said  
first electrode pattern, and a scanning signal is supplied to  
5 said second electrode pattern.

4. A liquid-crystal display apparatus comprising:

a first substrate having a first terminal for  
conduction between substrates, located adjacent to the edge of  
the substrate, and having a first electrode pattern which is  
5 electrically connected to said first terminal for conduction  
between substrates and which is arranged so as to extend  
toward an edge opposing the edge to which said first terminal

for conduction between substrates is adjacent; and

10 a second substrate having a terminal for input from  
the outside, located adjacent to the edge of the substrate, a  
second terminal for conduction between substrates, and a  
second electrode pattern, the substrates located in an opposed  
manner so as to extend in a direction in which said first  
electrode pattern and said second electrode pattern intersect  
15 with each other,

characterized by having a driving IC, mounted on said  
second substrate, an input terminal being electrically  
connected to said terminal for input from the outside, and an  
output terminal being electrically connected to said second  
20 terminal for conduction between substrates and said second  
electrode pattern, and

characterized in that said first terminal for  
conduction between substrates and said second terminal for  
conduction between substrates are electrically connected to  
25 each other by a conductive material sandwiched between said  
first substrate and said second substrate.

5. A liquid-crystal display apparatus according to claim  
4,

characterized in that said first terminal for  
conduction between substrates and said second terminal for  
5 conduction between substrates are located linearly toward an  
edge opposing the edge in which those terminals are formed.

6. A liquid-crystal display apparatus according to claim  
4,

characterized in that image data is supplied to said  
first electrode pattern, and a scanning signal is supplied to  
5 said second electrode pattern.


ABSTRACT

In a liquid-crystal panel 1, for a second electrode pattern 50 extended around the both sides on a second substrate 20 in such a manner as to avoid a first electrode pattern 40 formed on a first substrate 10, signal input is made directly from a second terminal 82 for input from the outside, and for the first electrode pattern 40 in which terminals 60 and 70 for conduction between substrates can be formed linearly, a signal is input by conduction between substrates. As a result, it is not necessary to perform conduction between substrates in a portion where a pattern must be extended obliquely, and for a portion where a pattern must be extended obliquely, only the second electrode pattern 50 capable of decreasing the distance between patterns may be formed.




1/14

Fig. 1

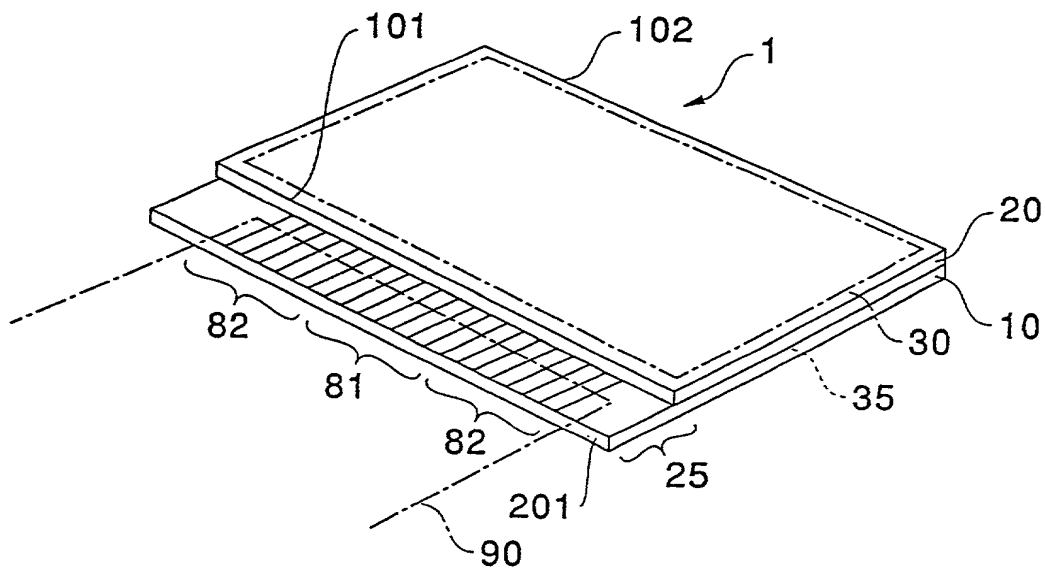

F i g . 2

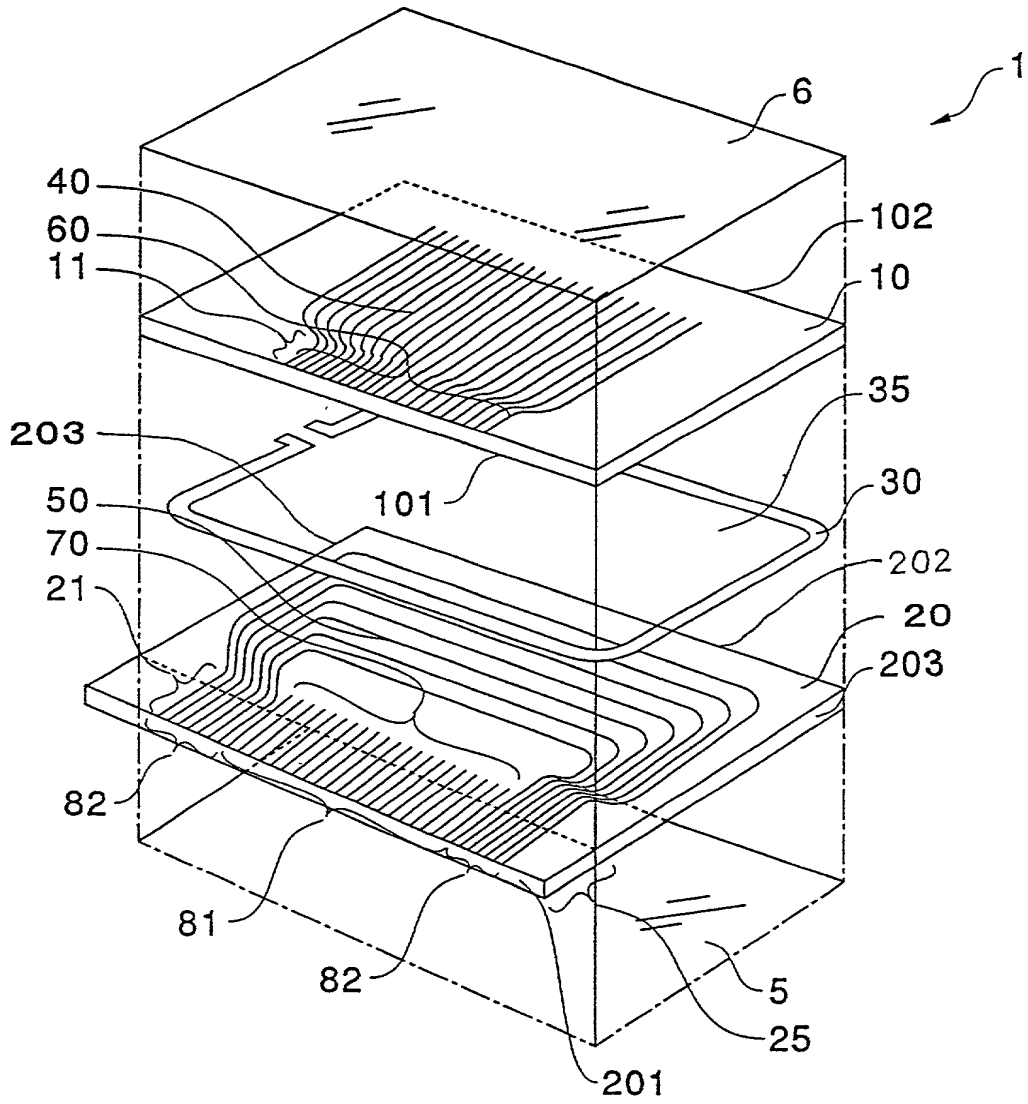

3 / 1 4

Fig. 3



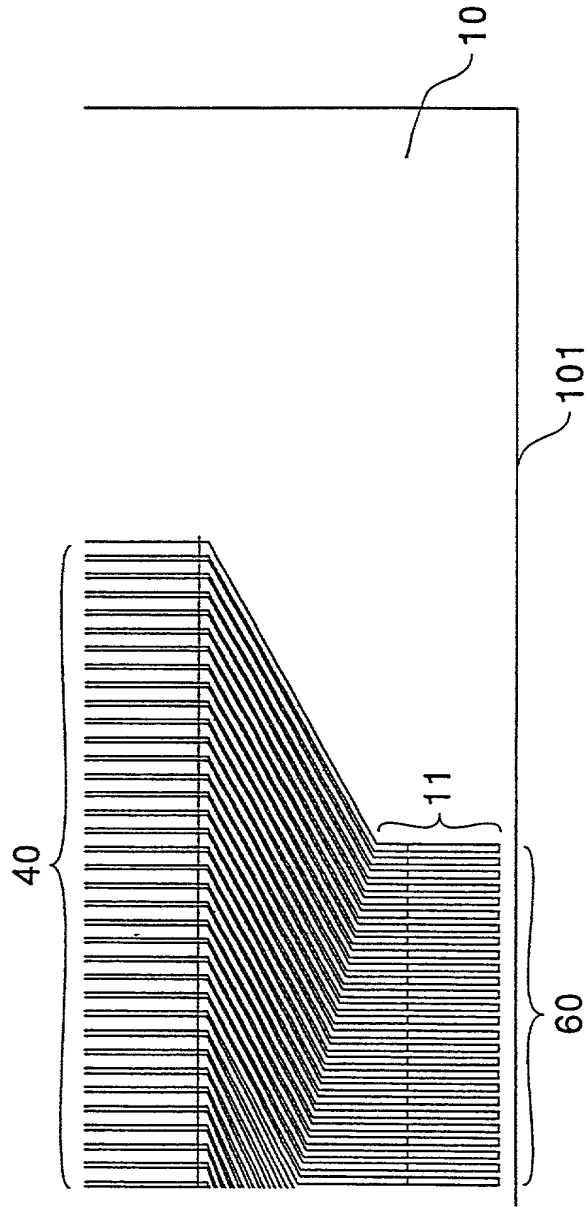


Fig. 4

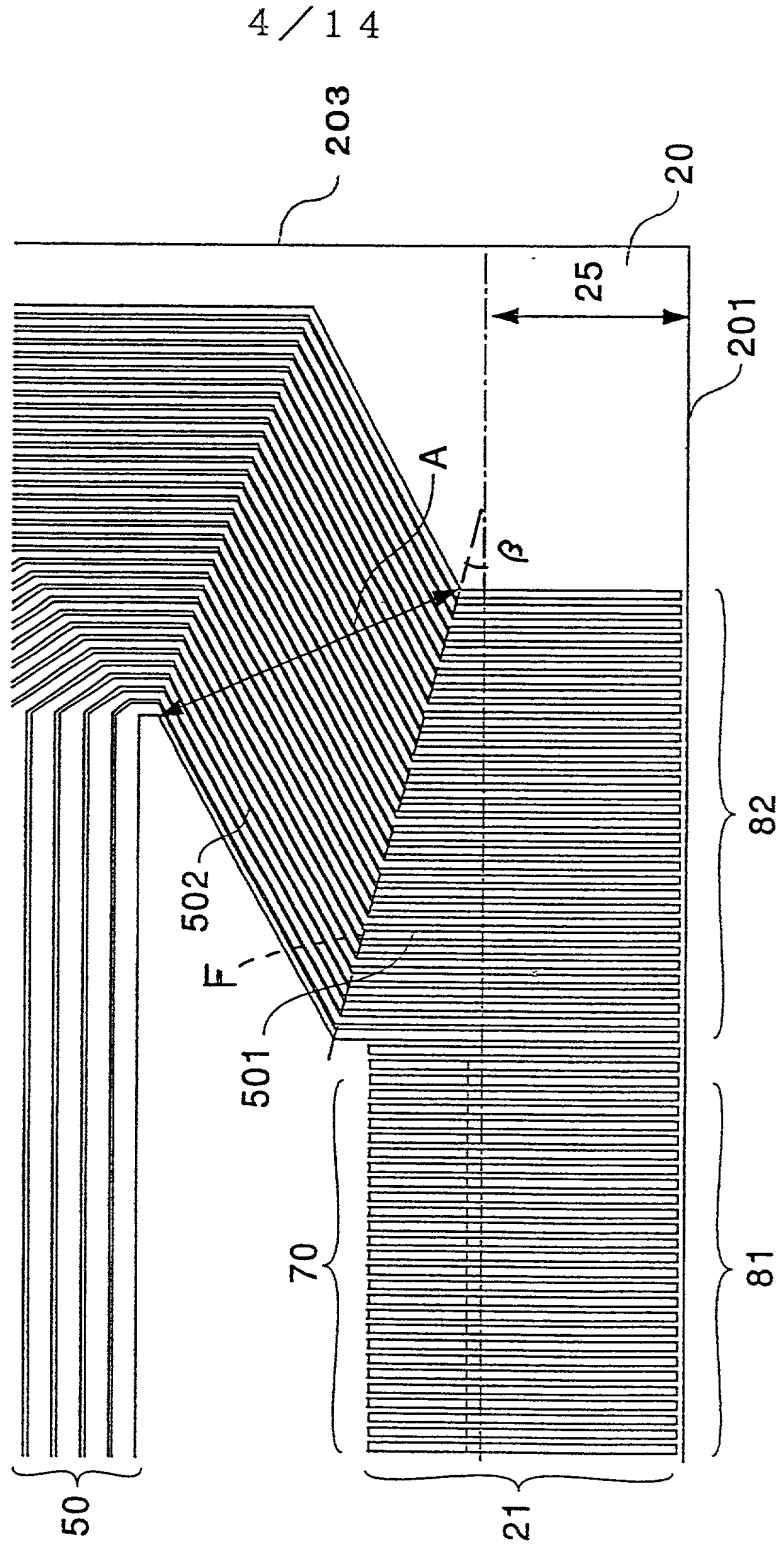



6/14

Fig. 6



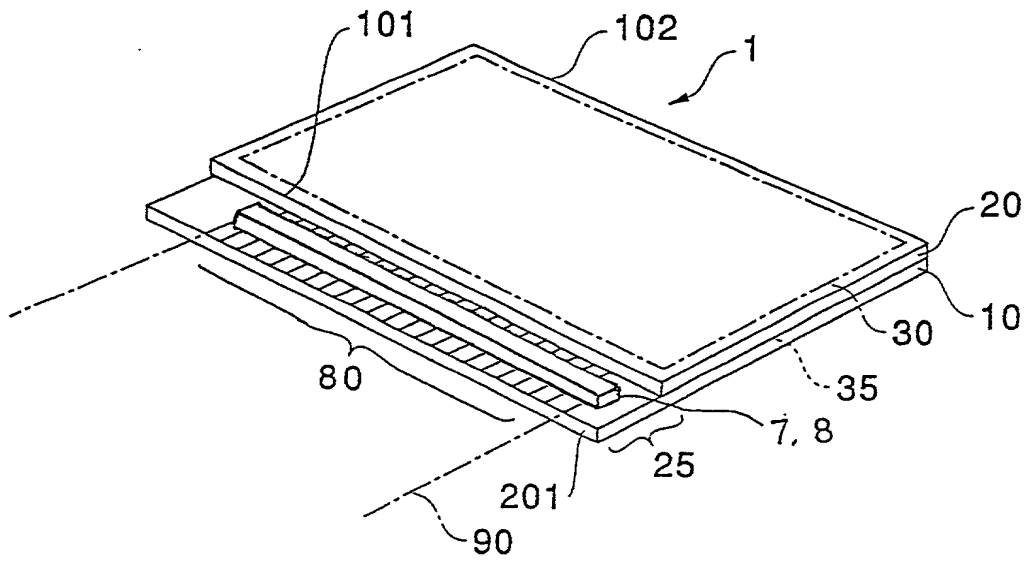


Fig. 7

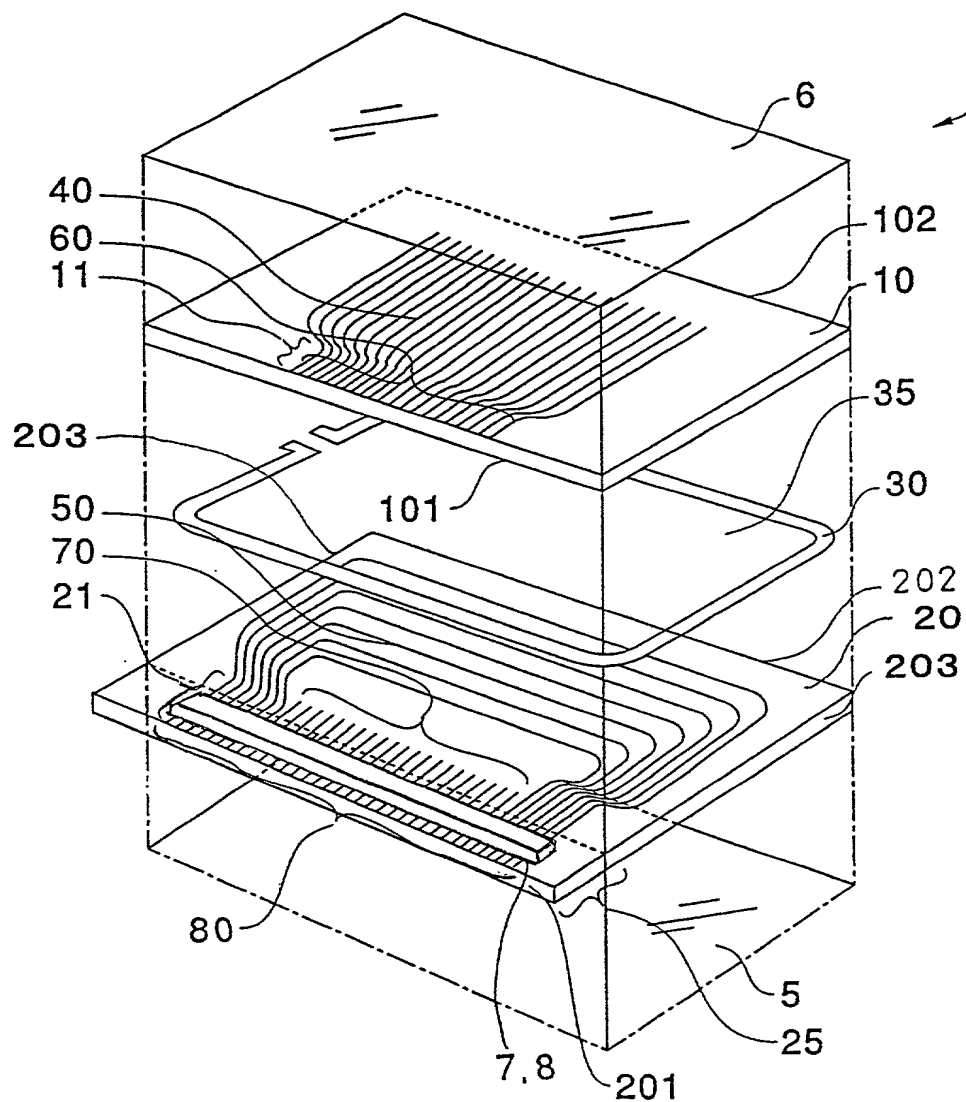

8/14

Fig. 8

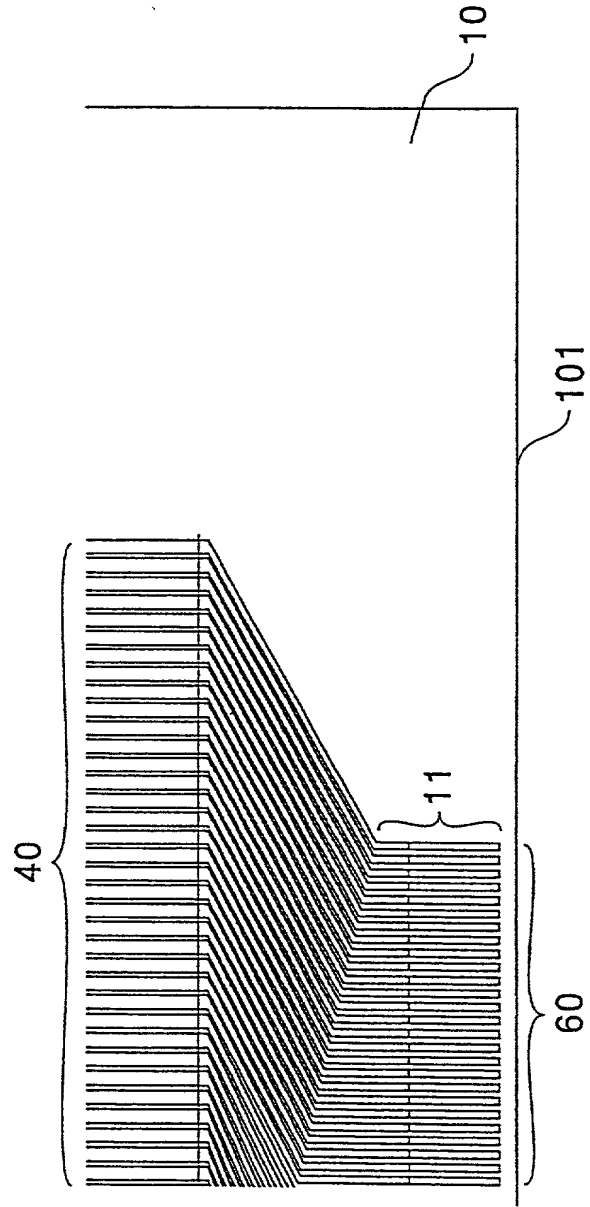



9 / 1 4

Fig. 9



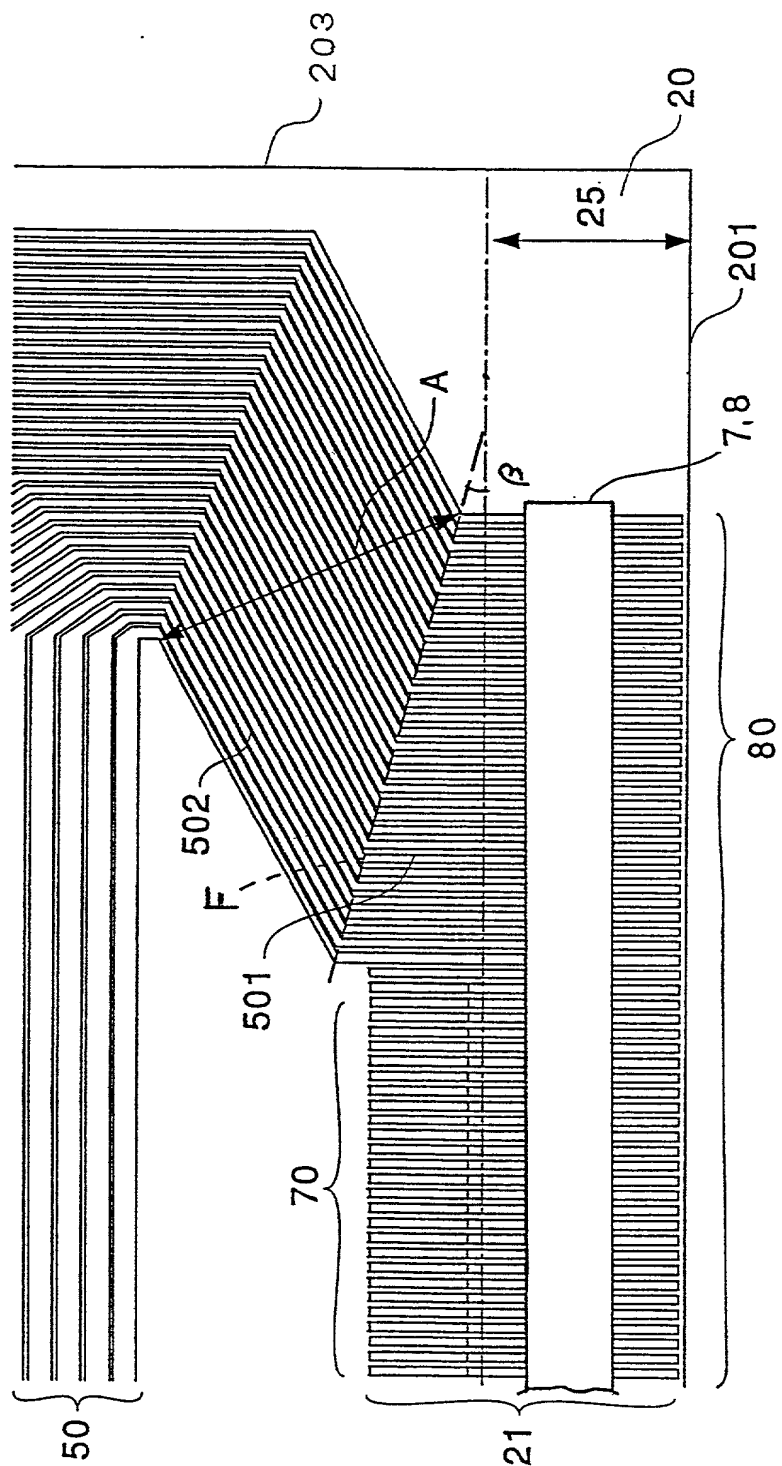


Fig. 10

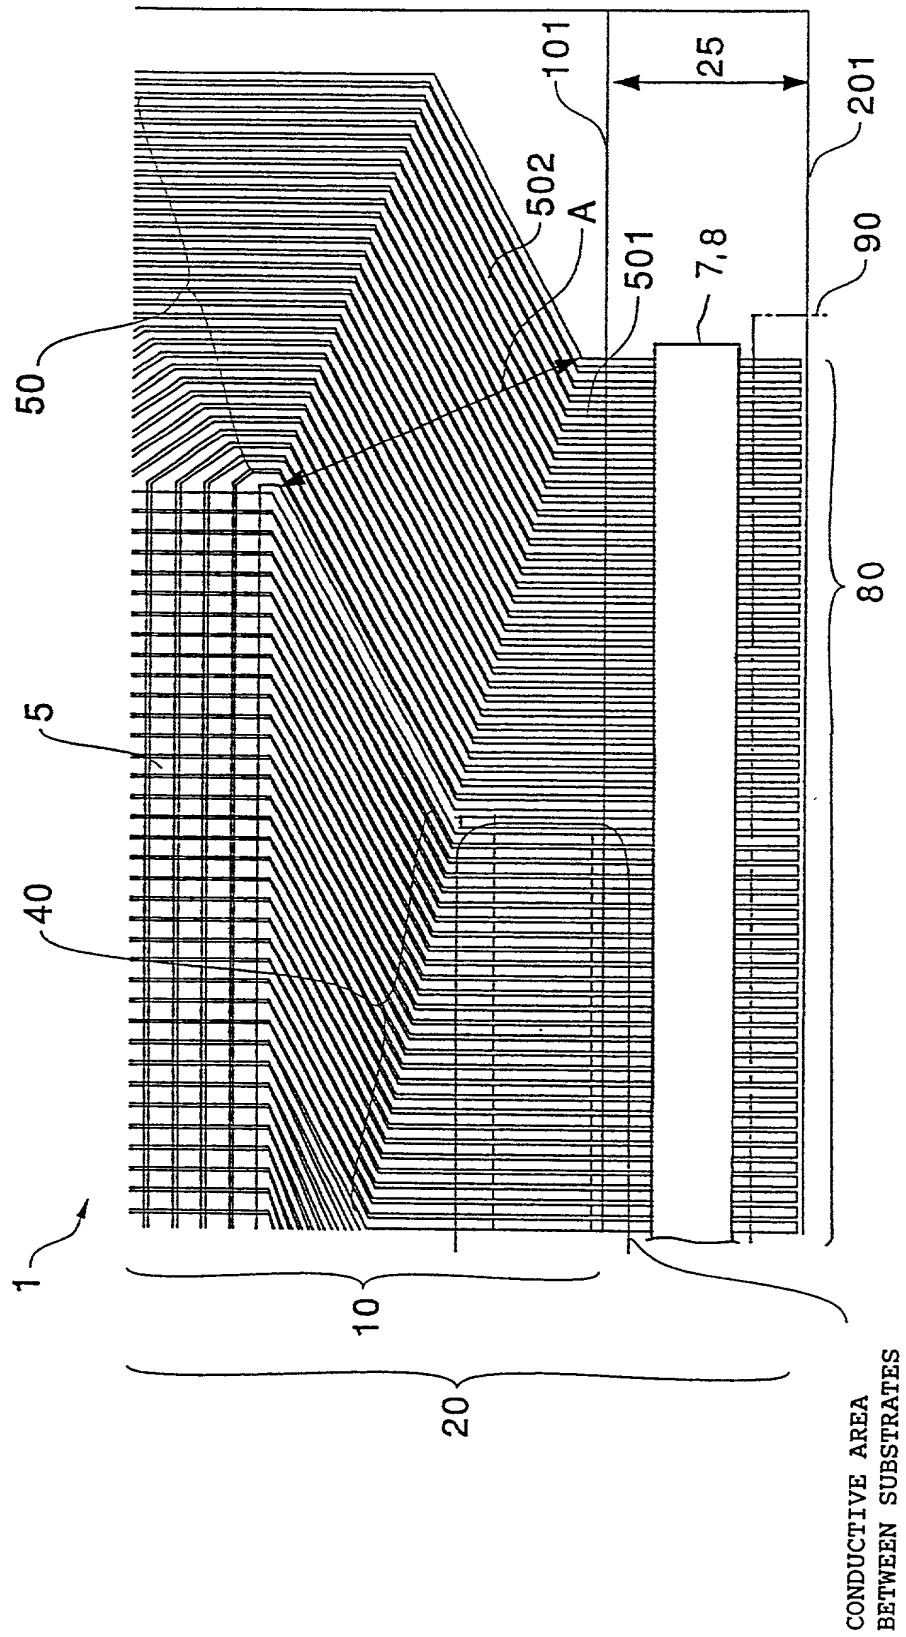

11/14

Fig. 11

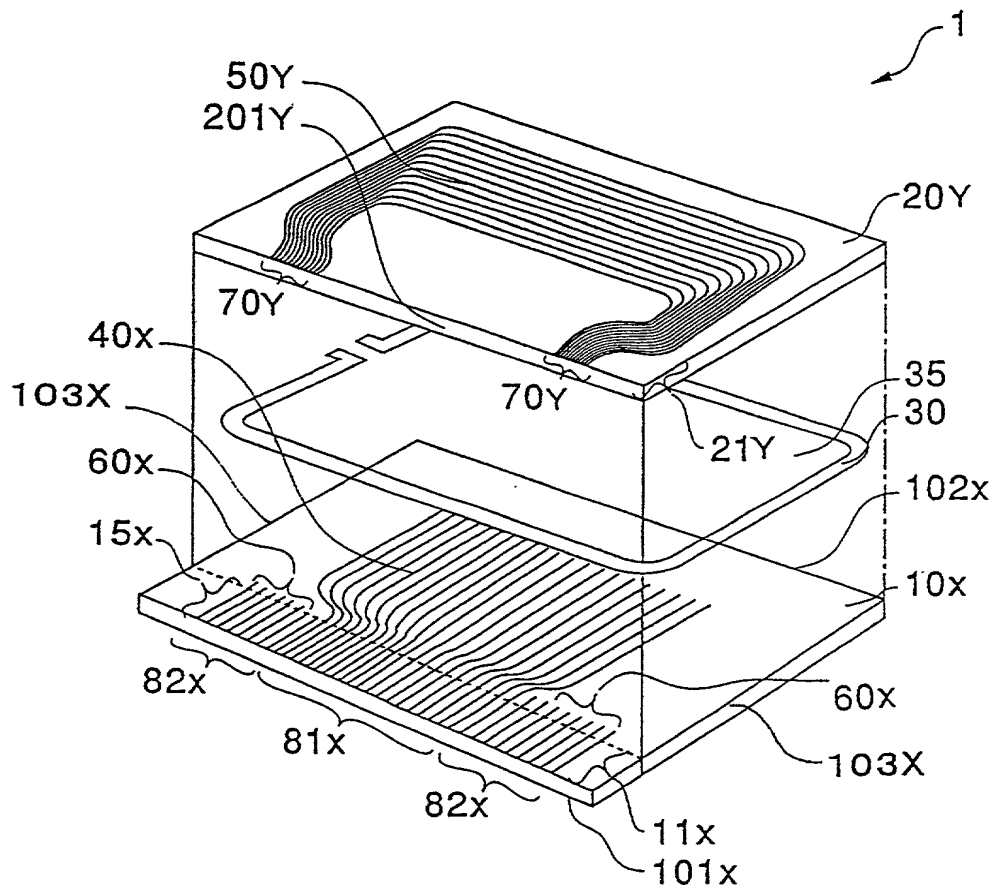

12/14

Fig. 12

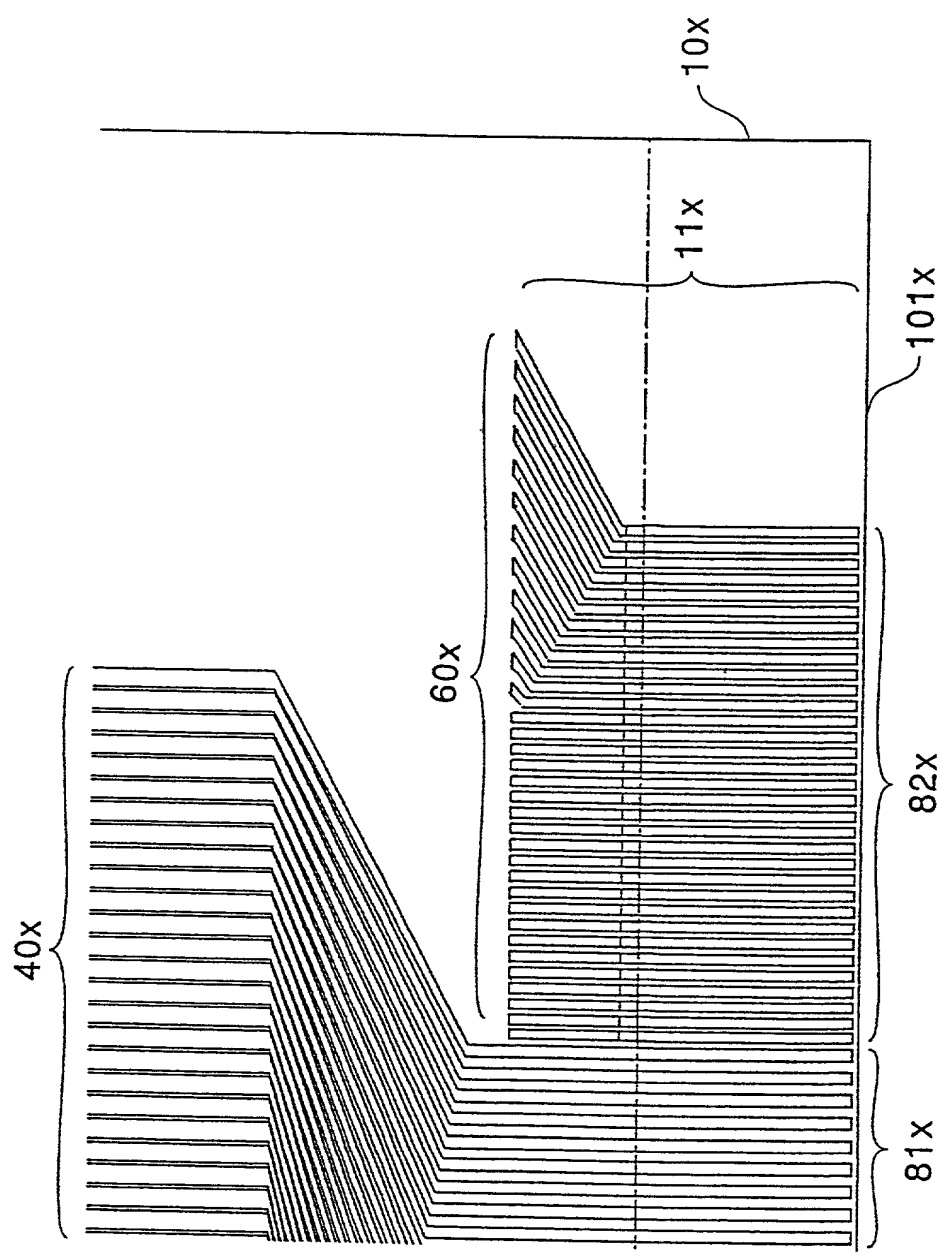


Fig. 13


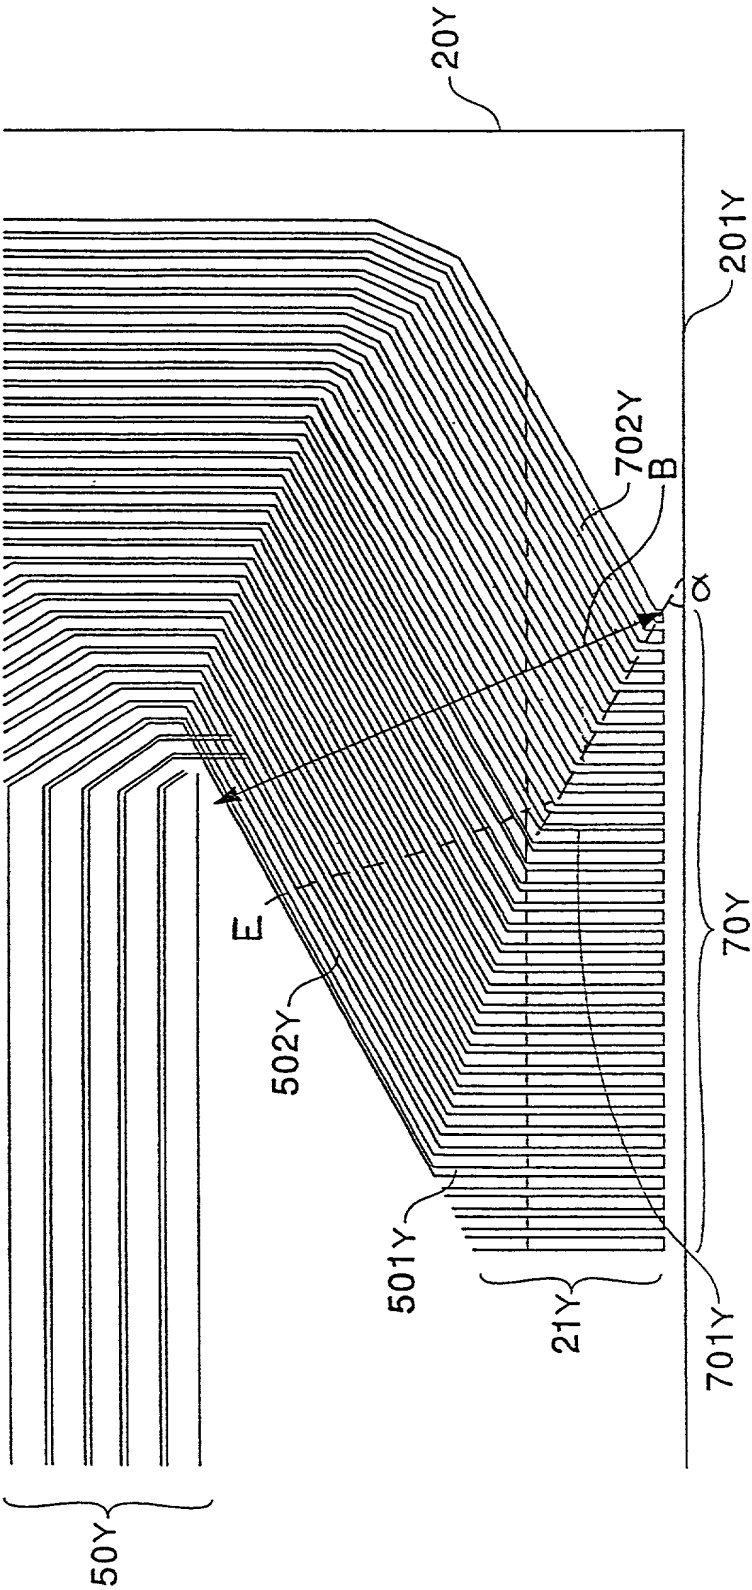


Fig. 14

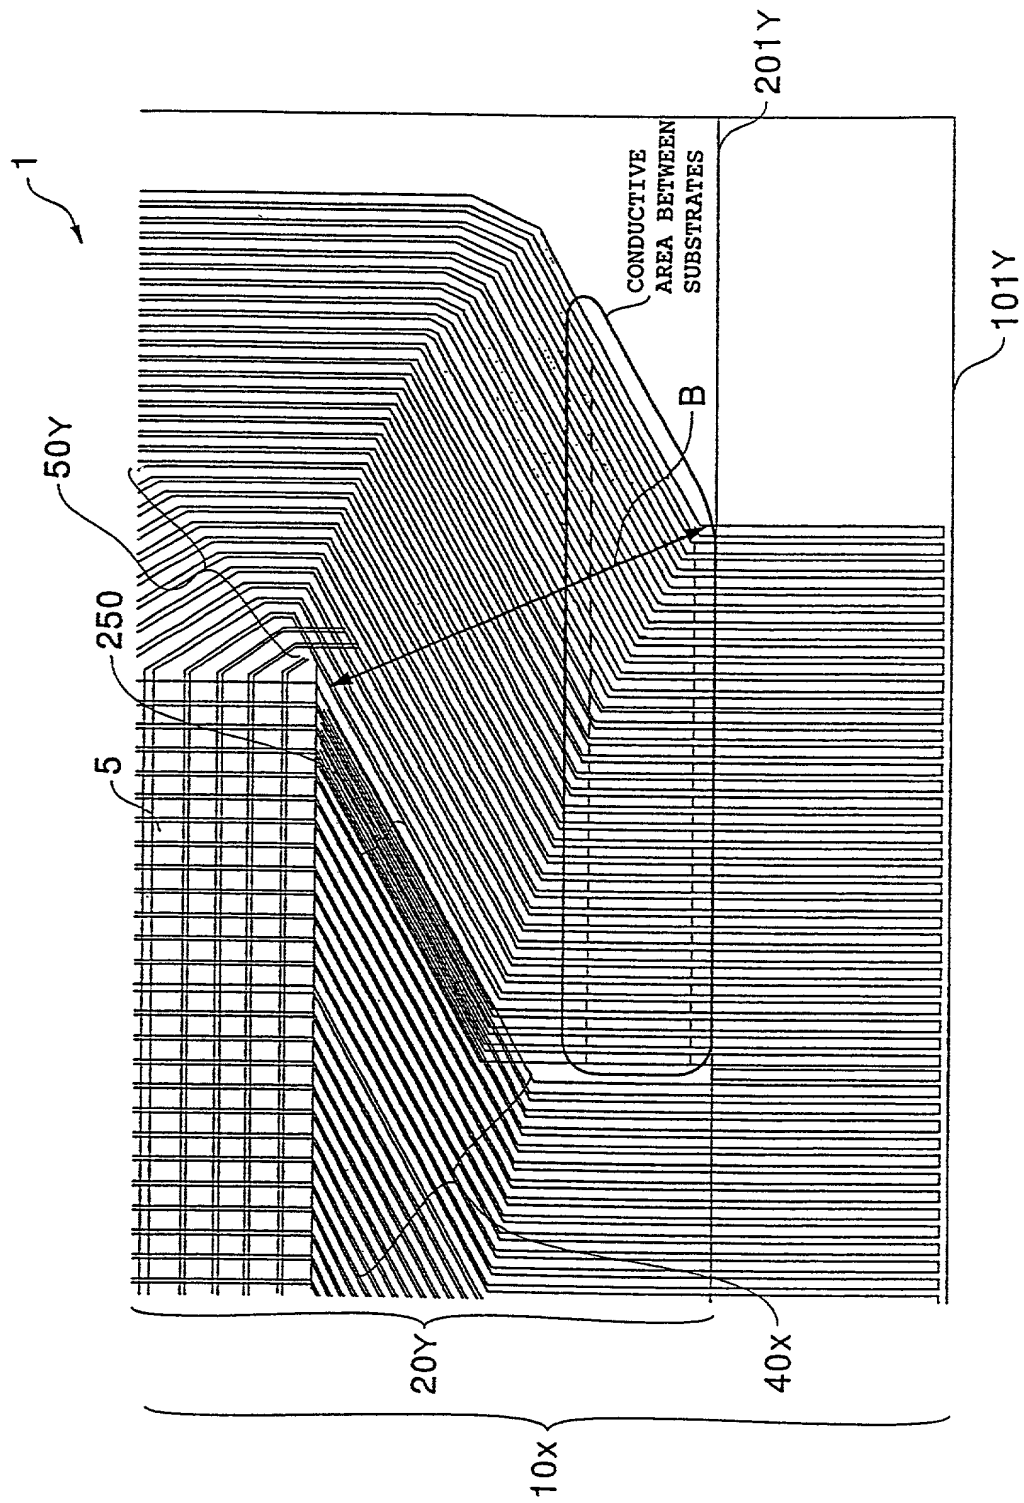

Seiko Epson Ref. No.: F004779US00

Attorney's Ref. No.:

**Declaration and Power of Attorney For Patent Application**

特許出願宣言書及び委任状

**Japanese Language Declaration**

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は、下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

液晶表示装置LIQUID-CRYSTAL DISPLAY APPARATUS

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

- ☒ 1999年11月5日に提出され、米国出願番号または  
特許協定条約 国際出願番号をPCT/JP99/06190 とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。

- ☒ was filed on November 5, 1999  
as United States Application Number or  
PCT International Application Number  
PCT/JP99/06190 and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration

### (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも1ヶ国を指定している特許協力条約365条(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

#### Prior Foreign Application(s)

外国での先行出願

Priority Not Claimed

優先権主張なし

10-320489

Japan

11/November/1998

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願年月日)

☐

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願年月日)

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119 (e) of any United States provisional application(s) listed below.

(Application No.)

(Filing Date)

(Application No.)

(Filing Date)

(出願番号)

(出願日)

(出願番号)

(出願日)

私は下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1章56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365 (c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application:

PCT/JP99/06190

05/November/1999

Pending

(Application No.)

(Filing Date)

(Status: Patented, Pending, Abandoned)

(出願番号)

(出願日)

(現況: 特許許可済、係属中、放棄済)

(Application No.)

(Filing Date)

(Status: Patented, Pending, Abandoned)

(出願番号)

(出願日)

(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私が入手した情報と私の信じるところに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.



Under the Paperwork Reduction Act of 1995, no persons are required to respond to collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration

(日本語宣言書)

委任状： 私は、下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

G. Gregory Schivley, (Reg. 27,382)

Bryant Wade, (Reg. 40,344)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

G. Gregory Schivley, (Reg. 27,382)

Bryant Wade, (Reg. 40,344)

4

## 書類送付先:

Harness, Dickey & Pierce, P.L.C.  
P.O. Box 828  
Bloomfield Hills, Michigan 48303

## Send Correspondence to:

Harness, Dickey & Pierce, P.L.C.  
P.O. Box 828  
Bloomfield Hills, Michigan 48303

## 直接電話連絡先: (名前及び電話番号)

Harness, Dickey & Pierce, P.L.C.  
(248) 641-1600

## Direct Telephone Calls to: (name and telephone number)

Harness, Dickey & Pierce, P.L.C.  
(248) 641-1600

## 唯一または第一発明者名

中原 弘樹

## Full name of sole or first inventor

Hiroki NAKAHARA

## 発明者の署名

中原 弘樹

## 日付

2000年6月21日

## Inventor's signature

Hiroki Nakahara

## Date

June 21, 2000

## 住所

日本国, 長野県, 塩尻市

## Residence

Shiojiri-shi, Nagano-ken, Japan

JPX

## 国籍

日本

## Citizenship

Japan

## 私書箱

392-8502 日本国長野県諏訪市大和3丁目3番5号  
セイコーエプソン株式会社内

## Post Office Address

c/o Seiko Epson Corporation  
3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan

## 第二共同発明者

伊藤 勝

## Full name of second joint inventor, if any

Masaru ITO

## 第二共同発明者の署名

伊藤 勝

## 日付

2000年6月21日

## Second inventor's signature

Masaru Ito

## Date

June 21, 2000

## 住所

日本国, 長野県, 諏訪市

## Residence

Suwa-shi, Nagano-ken, Japan

JPX

## 国籍

日本

## Citizenship

Japan

## 私書箱

392-8502 日本国長野県諏訪市大和3丁目3番5号  
セイコーエプソン株式会社内

## Post Office Address

c/o Seiko Epson Corporation  
3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

## Japanese Language Declaration

(日本語宣言書)

委任状： 私は、下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

G. Gregory Schivley, (Reg. 27,382)  
Bryant Wade, (Reg. 40,344)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

G. Gregory Schivley, (Reg. 27,382)  
Bryant Wade, (Reg. 40,344)

## 書類送付先:

Harness, Dickey & Pierce, P.L.C.  
P.O. Box 828  
Bloomfield Hills, Michigan 48303

## Send Correspondence to:

Harness, Dickey & Pierce, P.L.C.  
P.O. Box 828  
Bloomfield Hills, Michigan 48303

## 直接電話連絡先: (名前及び電話番号)

Harness, Dickey & Pierce, P.L.C.  
(248) 641-1600

## Direct Telephone Calls to: (name and telephone number)

Harness, Dickey & Pierce, P.L.C.  
(248) 641-1600

## 第三共同発明者

中村 猛

## Full name of third joint inventor, if any

Takeshi NAKAMURA

## 第三共同発明者の署名

日付

中村 猛

2000年6月21日

## Third inventor's signature

Date

Takeshi Nakamura

June 21, 2000

## 住所

日本国, 長野県, 南安曇郡三郷町

## Residence

Misato-vil Minami-Asumi-gun, Nagano-ken, Japan

## 国籍

日本

## Citizenship

Japan

## 私書箱

392-8502 日本国長野県諏訪市大和3丁目3番5号  
セイコーエプソン株式会社内

## Post Office Address

c/o Seiko Epson Corporation  
3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan

## 第四共同発明者

末廣 桂一

## Full name of fourth joint inventor, if any

Keiichi SUEHIRO

## 第四共同発明者の署名

日付

末廣 桂一

2000.6.21

## Fourth inventor's signature

Date

Keiichi Suehiro

June 21, 2000

## 住所

日本国, 長野県, 松本市

## Residence

Matsumoto City, Nagano Pref. Japan

## 国籍

日本

## Citizenship

Japan

## 私書箱

392-8502 日本国長野県諏訪市大和3丁目3番5号  
セイコーエプソン株式会社内

## Post Office Address

c/o Seiko Epson Corporation  
3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan

(第五以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for fifth and subsequent joint inventors.)